

SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class matter. Copyrighted, 1893, by Munn & Co.]

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.

Vol. LXIX.—No. 22.
ESTABLISHED 1845

NEW YORK, NOVEMBER 25, 1893.

\$3.00 A YEAR.
WEEKLY.

ELECTRIC LAUNCHES AT THE COLUMBIAN EXPOSITION.

No electrical feature at the World's Columbian Exposition was entered upon with more uncertainty than the introduction of electric launches on the lagoons, as up to this time such launches had not been made use of in this country except in an experimental way. In spite of these uncertainties, however, the launches were among the first electrical features that were ready and they have fulfilled their requirements during the entire period that the Exposition has been open, with gratifying results, carrying over one million passengers and earning \$314,000.

There are fifty of these launches that did service for the public, all of the type shown in our first page illustration. Each boat is 35 feet 10 inches over all in length and 31 feet 6 inches on the water line. The beam is 6 feet 2½ inches and the draught 27 inches. The lines are as near perfection as they well can be. At whatever rate the launch runs there is practically no wake, so that the wash on the shore, even in such narrow waterways as the lagoons, is of no consequence. The hulls of these boats were constructed of white oak frames, with white cedar planking. The inner paneling, decks and other parts are of mahogany. All the woodwork is finished in its natural color, thus giving a very rich appearance. Cut No. 4 shows the launch complete, with the pilot in the forward end controlling the supply of electricity and steering. The passengers are scattered about, the full seating capacity being 30 people. Cut No. 5 gives an idea of how the launches looked when laid up. Their berths were at the southeastern corner of the Agricultural building, in the South Pond, 30 boats being on the left in the picture and 20 on the right. When the boats were

to be charged they were laid up here, and whenever a boat needed repairs it was hauled up in its berth. The charging was all done at night, so as not to interfere with regular trips during the day.

Cut No. 1 gives a sectional view of a launch. It will be noticed that the motor is placed low down and in the center of the boat. This motor was designed and made especially for this use by the General Electric Company for the Electric Launch and Navigation Company, whose offices are at 44 Broad Street, New York City, which holds and owns the patent rights for the launches.


The motor is protected by a box which rises flush with the main deck of the boat, and is so set that all working and wearing parts can be readily reached. The storage batteries are placed around the sides of the boat, under the seats and entirely out of sight. The motor is nominally of four horse power, and is coupled direct to the propeller shaft. The type of this motor is shown in cut No. 3, while cut No. 2 illustrates the thrust ball bearing in which the shaft runs. By this combination of direct coupling and thrust bearing, all gearing and loss of power, as well as unnecessary noise and jar, are done away with.

The batteries used are of the Consolidated Electric Storage Company's type, of 150 ampere hours' capacity. Each boat has 66 cells, and these cells can be arranged in three groups of 22 cells in series or in two groups of 33 cells in series. Several improved devices have been brought out to adapt these cells to this use, so that there shall be no danger of the liquid spilling or of the efficiency of the cells being unnecessarily impaired. The cells are readily charged. The manner in which this is done is shown in the illustration. A charging station can be fitted up at little expense, and there is

probably no lake, river, or harbor in the country with sufficient water to float a launch where such a station could not be readily had. A current of 18 amperes per group is the one generally used to charge after a run of fifty or sixty miles at nominal speed, and from six to seven hours time is required. In case of necessity, however, a current of 30 amperes can be used, when the batteries can be charged in four or five hours. The plant which provided the current at the Exposition comprised a direct current shunt-wound Edison generator, giving a current of 110 volts. Any form of electric energy, however, arc or incandescent, can be used. Even when only an alternating current is to be had, a charging station can be arranged with not very great expense. When the station is once completed, all that is necessary is to connect the charging wires to a set of binding posts on the boat, as shown in the illustration, and turn on the current.

The operation of one of these boats is exceedingly simple, as shown by the experience of the Electric Launch and Navigation Company at the Exposition. Not one of the pilots or guards that managed the fleet had ever before handled an electric launch, yet they experienced no trouble whatever from the first. The control is by means of a small lever switch at one side of the steering wheel, which is located in the forward part of the boat. This lever allows of four speeds forward and two backward. The nominal speed at which the boats are run is from six to seven miles an hour, but they have a reserve speed of from eight to ten miles. At the ordinary speed the launches at the Exposition have been in constant use from twelve to fourteen hours a day on one charging, and the cost of this charging has never exceeded sixty cents per day per

(Continued on page 343.)

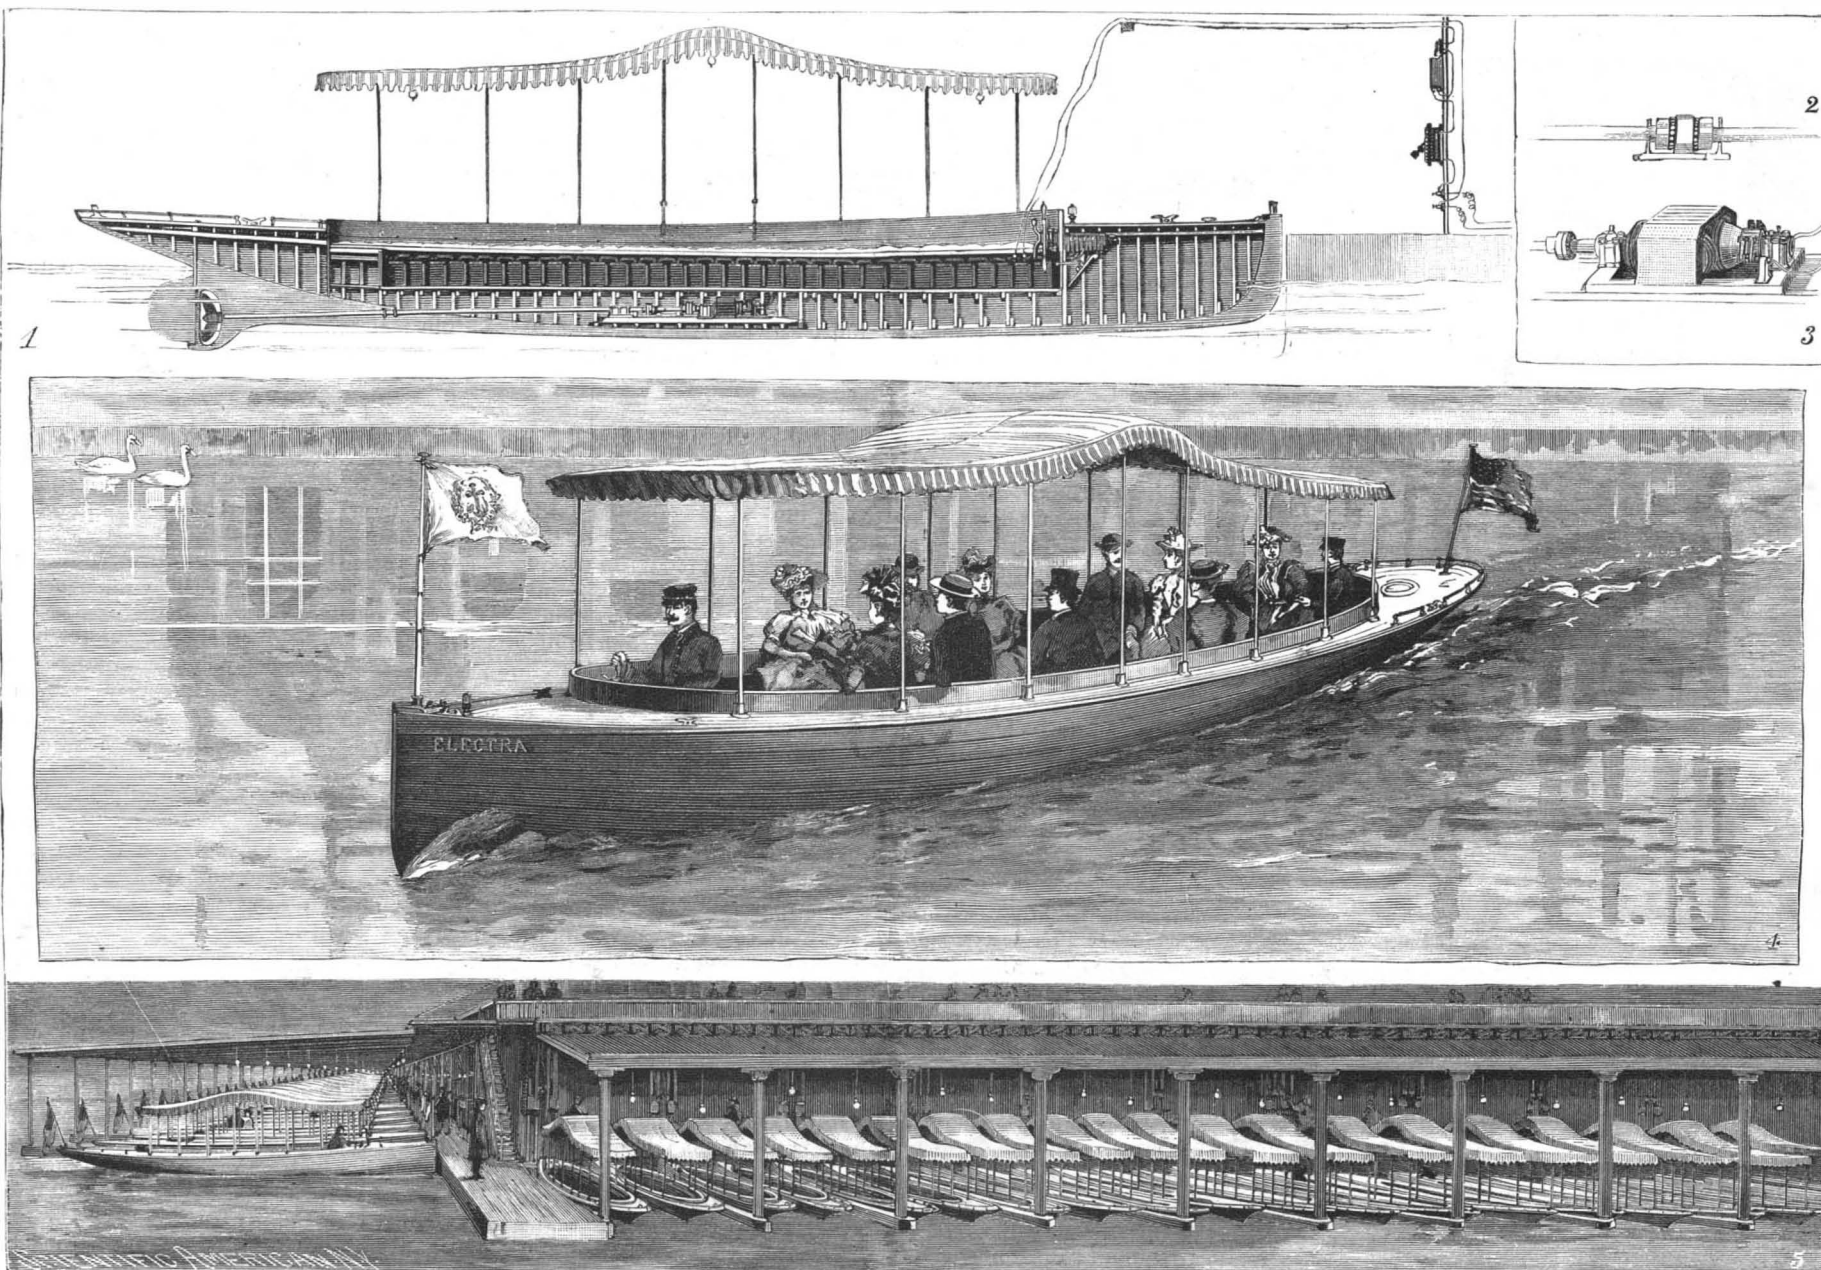

ELECTRIC LAUNCHES AT THE COLUMBIAN EXPOSITION.

Scientific American.

ESTABLISHED 1845.

MUNN & CO., Editors and Proprietors.

PUBLISHED WEEKLY AT

No. 361 BROADWAY, NEW YORK.

O. D. MUNN.

A. E. BEACH.

TERMS FOR THE SCIENTIFIC AMERICAN.

One copy, one year, for the U. S., Canada or Mexico.....\$3 00
 One copy, six months, for the U. S., Canada or Mexico.....1 50
 One copy, one year, to any foreign country belonging to Postal Union.....4 00
 Remit by postal or express money order, or by bank draft or check.
 MUNN & CO., 361 Broadway, corner of Franklin Street, New York.

The Scientific American Supplement

is a distinct paper from the SCIENTIFIC AMERICAN. THE SUPPLEMENT is issued weekly. Every number contains 16 octavo pages, uniform in size with SCIENTIFIC AMERICAN. Terms of subscription for SUPPLEMENT, \$5.00 a year, for the U. S., Canada or Mexico. \$6.00 a year to foreign countries belonging to the Postal Union. Single copies, 10 cents. Sold by all newsdealers throughout the country. See prospectus, last page.
 Combined Rates.—The SCIENTIFIC AMERICAN and SUPPLEMENT will be sent for one year, to one address in U. S., Canada or Mexico, on receipt of seven dollars. To foreign countries within Postal Union, eight dollars and fifty cents a year.

Building Edition.

THE ARCHITECTS AND BUILDERS EDITION OF THE SCIENTIFIC AMERICAN is a large and splendid illustrated periodical, issued monthly, containing floor plans, perspective views, and sheets of constructive details, pertaining to modern architecture. Each number is illustrated with beautiful plates, showing desirable dwellings, public buildings and architectural work in great variety. To builders and all who contemplate building this work is invaluable. Has the largest circulation of any architectural publication in the world.
 Single copies 25 cents. By mail, to any part of the United States, Canada or Mexico, \$2.50 a year. To foreign Postal Union countries, \$3.00 a year. Combined rate for BUILDING EDITION with SCIENTIFIC AMERICAN, to one address, \$5.00 a year. To foreign Postal Union countries, \$6.50 a year. Combined rate for BUILDING EDITION, SCIENTIFIC AMERICAN and SUPPLEMENT, \$9.00 a year. To foreign Postal Union countries, \$11.00 a year.

Spanish Edition of the Scientific American.

LA AMERICA CIENTIFICA E INDUSTRIAL (Spanish trade edition of the SCIENTIFIC AMERICAN) is published monthly, uniform in size and typography with the SCIENTIFIC AMERICAN. Every number of *La America* is profusely illustrated. It is the finest scientific, industrial trade paper printed in the Spanish language. It circulates throughout Cuba, the West Indies, Mexico, Central and South America, Spain and Spanish possessions—wherever the Spanish language is spoken. \$3.00 a year, post paid to any part of the world. Single copies 25 cents. See prospectus.
 MUNN & CO., Publishers, 361 Broadway, New York.

The safest way to remit is by postal order, express money order, draft or bank check. Make all remittances payable to order of MUNN & CO.
 Readers are specially requested to notify the publishers in case of any failure delay, or irregularity in receipt of papers.

NEW YORK, SATURDAY, NOVEMBER 25, 1893.

Contents.

(Illustrated articles are marked with an asterisk.)

Aluminum, reduction in price of.....	345	Gases, determining densities of.....	342
Balloon accident, singular.....	338	Gas meter connection, Gindele's.....	346
Bees, how many to a pound.....	339	Glass, fire resisting.....	342
Bicycle tires, preserving (5505).....	345	Gun throwing projectile 13 miles.....	344
Birds, leaving us.....	344	Hydrogen.....	342
Bookcase, Stinson's metallic.....	342	Inventions, recently patented.....	348
Building, rapid.....	346	Launches, electric.....	337
Camera stand, Green's.....	340	Mill engine, 400 H. P. compound.....	345
Cistern construction (5523).....	349	Notes and queries.....	343
Chicken beheader, Benham's.....	341	Patents granted, weekly record.....	349
Coin holder, etc., Berrini's.....	341	Photographing upon fabrics and marble.....	346
Color among fishes.....	339	Postal fractional currency.....	346
Colors, action of light on dyed.....	347	Potassium permanganate as antiseptic.....	347
Columbia, the new war steamer.....	338, 347	Propeller, Davies' improved.....	346
Dam, the La Grange, Cal.....	346	Rail tests, railway.....	343
Diamonds, artificial.....	340	Roe, egg of the fabled.....	339
Disinfectant, peroxide of hydrogen.....	339	Saw, cross-cutting, an English.....	340
Ebonite packing rings.....	341	Shaper, drawing cut, the Morton.....	344
Electrical inventions, recent.....	348	Skins, small, curing (5504).....	348
Electrical inventors, prizes for.....	342	Snow sheds of the Union Pacific Railroad.....	346
Electric launches at the Exposition.....	337	Steam carriage, a for road use.....	346
Electrolier, Rivenburgh's.....	338	Stereoscopic lantern, Anderton's.....	345
Engineers needed for the navy.....	340	Sun, the, no oxygen in.....	342
Engine, rotary, Morse's.....	340	Temperature of the ground (5524).....	349
Fire alarms, Paris system of.....	341	Tuberculosis and its prevention.....	344
Fishes at high temperatures.....	339	Vibrations of buildings, photographing.....	340
Fish, freezing.....	343	Victoria, the loss of the.....	344
Fluorine.....	343		

TABLE OF CONTENTS OF SCIENTIFIC AMERICAN SUPPLEMENT No. 934.

For the Week Ending November 25, 1893.

Price 10 cents. For sale by all newsdealers.

I. BIOGRAPHY.—Marechal de MacMahon.—The famous French Marshal of France, lately deceased.—Notes of his life, with portrait.—1 illustration.....	14930
The John Hunter Centenary.—The life of the most famous British surgeon of the last century.—7 illustrations.....	14930
II. BIOLOGY.—Oceanography: The Pacific Bed.—By RICHARD BEYNON.—An interesting article on the deposits of diatoms and other low forms of life lying on the ocean bed.....	14928
III. COLUMBIAN EXPOSITION.—A Few Curiosities.—Curiosities in anthropology at the Exposition.—10 illustrations.....	14922
Old Locomotives at the Columbian Exposition.—Interesting exhibit of a number of early locomotives marking the development of American practice.—6 illustrations.....	14919
The Exhibition of Paintings at Chicago.—A valuable review of the pictures shown at the great Exposition.—Notes on the different artists, and the national characteristics of their work.....	14923
IV.—EDUCATION.—Technological Schools.—Their purpose and its accomplishment.—By ROBERT H. THURSTON.—A great need of the United States discussed by a leading educator.....	14920
V. GEOGRAPHY.—The War in Africa.—By ARCHIBALD R. COLQUHOUN.—Scene of the war in Matabeleland and character of the natives and king.—3 illustrations.....	14926
VI. HYGIENE.—Of the Pleasures of Eating and of the Means that may be Employed for Increasing Them.—Extract from an essay by Count RUMFORD, being a plea for the utility of enjoyment of eating.....	14934
VII. MEDICINE.—Pilocarpine—Its Physiological Action and Therapeutic Uses, with Exhibition of Specimens showing change in the Color of the Hair.—By D. W. PRENTISS, M.D.—Conclusion of this interesting article, treating of the changes in the color of the hair produced by this alkaloid and by other causes.....	14933
Therapeutic Superstition.—By GEORGE T. WELCH.—Curious instances of medical practice and extraordinary remedies.—Interesting instances of old and new medical practices.....	14931
VIII. MISCELLANEOUS.—In the Bank of England.—Interesting objects to be seen in the famous institution.....	14925
The New Congressional Library.—One of the greatest buildings in the United States, now under process of construction.....	14925
IX. PHOTOGRAPHY.—Electrical Action of Light upon Silver.—By Colonel J. WATERHOUSE.—Some interesting researches on photochemistry.—Observations on the reversal of the photographic image.....	14929
The First Photo-Mechanical Reproduction.—By JULIUS F. SACHSE.—A disputed point in the history of this art.—A famous question discussed.....	14921
Varnishes and Varnishing.—Formulae and directions for photographic varnishes.....	14922
X. RAILROAD ENGINEERING.—The Motive Power will Stay at the Head of the Train.—The possibility of electric motors in railway service reviewed.—Their disadvantageous features.—Advantages of concentrating power.....	14919
XI. TECHNOLOGY.—Textile Fibers.—Transverse sections of textile fibers prepared for the microscope.—1 illustration.....	14924

MORE ENGINEERS NEEDED FOR THE NAVY.

The annual report of Geo. W. Melville, Engineer-in-Chief, Chief of Bureau of Steam Engineering, shows that the repairs of machinery and steam vessels during the past year have cost something over \$600,000. The lack of competent engineers to man the rapidly increasing number of war vessels has become a serious matter. On the active list there are only 180 commissioned officers in the engineer corps, namely, 70 chief engineers, 66 passed assistants, and 44 assistants.

The chief says: "Unless something is soon done, our navy, now practically an engineering one, will be crippled for want of engineers."

"This question of the sufficiency of engineers in the service is one of paramount importance, and no other, if left in abeyance, will so vitally affect the efficiency of the navy as a fighting organization. It must be remembered that the efficiency of the modern war ship, either as a fighting machine or as a commerce destroyer, depends wholly and absolutely upon her machinery, and the efficiency of this machinery upon the skill of her engineers, and upon the diligence exercised by them in its care and management. Be her armor and armament the most powerful and her commander the most capable and intrepid, if her machinery fails, she is helpless, and no amount of seamanship and gunnery will avail against the enemy."

"Were the navy a mercantile concern, the present state of affairs would not last beyond the time necessary to change it, for men with capital invested in machinery see to it that there is a force sufficient to keep it in proper maintenance; and surely if business people find such a course economical, the government cannot do better than follow their example. The value of the naval machinery now owned by the government and in process of construction is about \$24,000,000, and it has now come to the point where Congress must decide whether it is more economical to properly care for this machinery and keep it always in an efficient condition or to let it run as long as it will and then replace it, taking meanwhile the risk of having it fail when most needed. As an illustration of the increased work thrown on the members of the engineer corps by the acquisition of the new navy, I can state that the New York has added 17 per cent to the horse power of the machinery of vessels in commission; the Columbia will add 17.3 per cent more; and when the ships now authorized and building are finished, the horse power of the propelling machinery of the navy will have increased to nearly two and a half times its present amount—and yet we are asked to run it with the same number of engineer officers that we now have."

"The officers of the engineer corps at sea on the new vessels have altogether too much work to do now, and it is merely a question of time before the strain will tell. The result of this hard work is being seriously felt; retirements are increasing, and the government thus subjected to an expense greater than would be involved in now granting a fair increase of numbers, while some of those who manage to complete a cruise in one of the high-powered ships only await a favorable opportunity to resign. Many of our young officers who have resigned to accept lucrative and responsible positions would have preferred to remain in the service if they could have seen any chance of advancement in it."

THE COLUMBIA, THE NEW COMMERCE DESTROYER.

The new American navy has become a popular subject with the people at large. The records of the trial trips are given place in the papers, and much congratulation is expressed over the results obtained. Yet the fact is apt to be forgotten that a few hours' run of a new ship under the most favorable auspices does not tell what she will do in the service. To-day no satisfactory method of keeping an iron ship's bottom free from barnacles and seaweed is known, and the slightest deposit reduces speed. The duration of the engines and boilers under service conditions is problematical. The warship certainly seems to deteriorate or to develop weakness in her boilers or machinery in very short periods.

From the old sailing vessel, through auxiliary steamships, the development has at last brought us to triple screw ships without sail power enough to be of more than the slightest service. It is perhaps true, as ex-Secretary Tracy says, that we have in the Columbia, New York and Olympia three ships unapproachable in good qualities. But admitting this, the question has to be answered of how long these ships will retain their qualities. Will they hold their present efficiency for years, or even months? Time and repeated speed trials can alone show this.

An attempt was made on Thursday, November 16, to subject the new cruiser Columbia to an official trial over a 44 knot course. Buoys were placed along the course, vessels were anchored near each buoy, and the ship started on her trial run. On the trip from Philadelphia to Boston, she had already shown very high speed. On attempting the trial, however, the sea was so high that the buoys were displaced, and the attend-

ant vessels could not lie at anchor, so the trial was abandoned. Sufficient, however, was done to show that the vessel does possess very high powers, reaching a rate of speed, for a short run, from 28 to 29 statute miles an hour. This speed of course she could not long maintain, but for a ship of her size to reach it was very extraordinary. Not only was her rate of travel very high, but the Columbia is designed to have a very long radius of action, being able to steam around the world without recoaling.

While the above sounds very satisfactory, and the ship is apparently a triumph of American construction, experience has shown that it is not safe to judge a war vessel from these trials. A vessel designed for use as a warship, when put in charge of the navy and kept in such service, never is able to hold her original record. The English government has all its ships of war rated, each one at its specific speed, but it has time and again been shown that the rating is far too high, and the ships, owing to deterioration of the propelling apparatus or to marine growth on their bottoms, always show a greatly reduced speed.

The Columbia is built for a commerce destroyer. She may be able to run away from any heavy fighting ship. In war her competitors would be the fastest ships of the British navy. Among these, at present, are the reserve ships Campania and Lucania, of the Cunard line, ships which day in and day out maintain speed approximating to the highest obtainable by the Columbia on her trial trip, ships which from the conditions of their service are always kept in the best possible condition for instant service. Each regular trip consists of a run of some 3,000 miles, in which runs a gain of five or ten minutes over the record is eagerly striven for. It is not improbable that the Columbia, driven under forced draught, straining every fiber under the action of the machinery, stripped and in the most perfect condition for a few hours' run with selected coal, will earn for her builders a premium of \$400,000. After all this she will not have been properly tried. She should be manned with a crew from the American navy, she should be coaled under ordinary conditions of quality of fuel, and her trial course should be the same as that of the Cunard ships or of the German or American line vessels—the course of about 3,000 nautical miles across the ocean. Then we could establish her true rating, and the trial would show whether she could compete in war with the Lucania and Campania, with the Furst Bismarck or the Paris. In the present system of trial trips everything is subordinated to making the highest possible speed over the short course of forty to fifty miles.

While her trial has been in progress or preparation, Mr. Charles H. Cramp, of Philadelphia, who represents the firm which built her, presented before the Society of Naval Architects and Marine Engineers of this city a paper on the "Evolution of the Atlantic Greyhound." In about a year the two ships of the American line built at the Cramp yard will be in commission. In them he proposes to go back to the old American idea of high initial stability and make ships which will stand on their own bottoms without the use of 1,000 tons of ballast. These ships will be in continual service and will be driven at full speed under the regular conditions of their work. In such vessels as these enrolled as a naval reserve would seem to be the greatest hope of our navy for the really efficient commerce destroyer.

A Singular Balloon Accident.

A Rome correspondent of the London *Daily Graphic* says: Captain Charbonnet and his wife recently met with an extraordinary balloon accident in the Alps. Captain Charbonnet was a well known Italian aeronaut. He was recently married in Turin, and, in accordance with a previous decision, the couple set out immediately in a newly constructed balloon—the wedding present of the bridegroom to his bride. Their intention was to spend their honeymoon in making a series of aerial trips across the Alps. They were accompanied by a male friend named Giuseppe Ponta. The first day's trip proved successful. On the following day, however, when near the Cairnella Peaks, the balloon was caught in a hurricane, dashed violently against a glacier, and broken up. Strangely enough, the occupants escaped this mishap with trifling injuries. The balloon, of course, was useless. The unfortunate trio remained on the snow and ice until the following morning, when a descent of the mountain was attempted. It was during this descent that Charbonnet lost his life, disappearing suddenly in a crevasse. His unfortunate wife and Signor Ponta, who were forced to spend the rest of the day and the following night on the mountain, suffered terribly from the cold. Signor Ponta fell and sustained serious injuries, Signora Charbonnet having thus to make her way alone. Here, acting upon her instructions, a party of men discovered Ponta and brought him safely back. The remains of Captain Charbonnet were recovered on the following day. Two days later Signora Charbonnet and Signor Ponta were sufficiently recovered to be removed to Turin.

Natural History Notes.

Discovery of an Egg of the *Aepyornis*.—A large specimen of the egg of the fabled "roc" of the "Arabian Nights," or *Aepyornis*, as the extinct gigantic bird of Madagascar is called, has recently been secured by Mr. J. Proctor, of Tamatave and London. It was discovered by some natives about twenty miles to the southward of St. Augustine's Bay, on the southwest coast of Madagascar. It was floating on the calm sea, within twenty yards of the beach, and is supposed to have been washed away with the foreshore, which consists of sandhills, after a hurricane in the early part of the year. The child-like longshoremen of the antipodes, thinking that the egg might have a value, showed the unusual piece of flotsam about, with a view to the sale of it, and it thus came into the hands of Mr. Proctor, who has brought the curiosity to London. The egg, which is whitish-brown in color and unbroken, is a fine specimen, $3\frac{1}{2}$ inches by 28 inches, and an even higher value is placed upon it than upon the egg of the great auk, which lived within the memory of man. The Brobdignagian proportions of the egg are better demonstrated by comparison with the eggs of the ostrich and crocodile. An ostrich's egg is about 17 inches by 15 inches, and the contents of six such are only equal to one egg of the *Aepyornis*. The measurements of the egg of the crocodile are normally 9 inches by $6\frac{1}{2}$ inches. It would require the contents of $16\frac{1}{2}$ emu's eggs to equal the contents of this great egg, or 148 eggs of the homely fowl, or 30,000 of the humming bird. The last egg of the kind disposed of in London sold for £100, though cracked.

A Plant with Anomalous Position of Flowers.—In the *Journal de Botanique* for July 1 and 16, Mr. Hua describes, as a new genus, a plant from west tropical Africa, in which the flowers are borne along the midrib on the back of the leaf. This anomalous position of the flowers is only of rare occurrence, appearing in a few almost or quite monotypic genera, such as the Japanese *Helwingia* of the Araliaceæ, the saxifragaceous *Phyllonoma* of the New World, and *Polycardia* (Celastrineæ) from Madagascar. The common lime recalls, in a small degree, the same phenomenon, the stalk of the inflorescence adhering to the lower part of the bract and appearing to spring from the middle of that organ. Tropical West Africa boasted already two genera with epiphyllous flowers, both belonging to the family Bixineæ, and *Mocquerysia*, the new one established by M. Hua (named after its discoverer, M. Mocquerys) resembles these in some points, and is placed by its author in the same natural order.

Fishes at High Temperatures.—Dr. Lawrence Hamilton has recently forwarded to *Natural Science* some interesting statistics that he has collected in reference to the existence of fishes in water of a high temperature. Some of the cases are very striking. Spallanzani, it appears, observed river carp living at a temperature of 106° F., and exhibiting no signs of uneasiness, though at 109° they began to struggle, and died at 116° F. Dr. John Davy (1835) showed that the bonito had a temperature of 99°, while the water of the Mediterranean, in which it was, had only a temperature of 80°. Saussure stated that he found eels in the hot springs of Aise, in Savoy, at a temperature of 113° F. In 1882, Dr. Davy found that water at 85° F. killed trout by convulsions. A trout and a minnow were put in water at 70° at night, which by the next morning had sunk to 67°, when the trout was dead, though the minnow had not suffered. A salmon parr at 80° became convulsed and torpid, dying at 84°. Several fishes were deposited in water at 53° F.; the temperature of the water was gradually raised, and none showed signs of failing vitality till the thermometer rose to 82°, when the perch became prostrated, roach succumbed at 82½°, salmon at 83°, minnow at 85°, gudgeon at 85½°, dace at 86°, tench at 88°, and carp at 91°. Brandy restored all the fishes except the dace, which died.

In India fishes at noon day in their natural water remain in health at 92°; at 4 P. M., 86°; and at 6 P. M., 82°. Gunther states that cyprinodonts live in briny springs even at a temperature of 91° F.

Sir Emerson Tennent collected the following observations, which seem to require further proof or verification:

In the hot springs of Ceylon, living carp, *Nuria thermoicus*, at 114° F.; members of the perch family, the *Apogon thermalis*, and the *Ambassis thermalis*, in water at 115° F.; a roach, *Leuciscus thermalis*, at 112° F.

In a hot spring at Pooree (in the province of Bengal), with the thermometer in the water standing at 112° F., carnivorous fishes have been discovered, which would indicate that these must have found and fed on living prey at the same high temperature. Further accounts, moreover, declare that in hot springs in Barbary, in North Africa, living fishes have been taken in water at 172°, while in Manila (one of the Philippine Islands) in water marking 187° F. While traveling in South America, Humboldt and Koupand stated that they saw fishes thrown up alive from a volcano in water at 210° F., but this is, of course, an absurdity which nowadays, it is to be hoped, no one will believe.

Rudiments of a Pouch in Placentals.—If ordinary placental mammals have evolved from pouched animals like the modern marsupials, rudiments of the pouch ought certainly to be recognizable in some of them. Dr. H. Klaatsch has just made the interesting announcement that such rudiments can actually be observed in most placentals. Something of the kind has already been found in the lemurs, and one author has supposed that rudiments of the pouch can also be detected in the sheep. The detailed account of Dr. Klaatsch's extension of the evidence will be awaited with interest.

Color Assimilation among Fishes.—We already know a good deal about this, says Mr. James Hornell, in *Natural Science*, especially among the flat fishes; so the following instances but go to swell an already long list. Still, these are so striking as to be worthy of permanent record.

Two tanks were used for experiment, one with dark background and bottom, well shadowed; the other bright, with a white mottled sand bottom. Several of the marine stickleback (*Gasterosteus spinachia*) were placed in each. To sum up the result briefly, those in the dark shadowed tank remained practically unchanged in color, but those in the light colored tank had in greater or less degree lost their brightness and intensity of coloring. The beautiful gold bronze luster so characteristic of these sticklebacks was lost, and the backs were mottled black and white, contrasting strangely with the nearly unbroken yellowish black of the dorsal surface of their friends in the dark tank.

In the dark tank had also been placed a number of wrasses (Labridæ), and these showed fading all round, most marked in the bright greens and scarlets. As these colors are usually in combination with brownish marking, the fading of the bright hues meant a close approximation to the brown appearance of the bare conglomerate forming the rockwork of the tank. One fish especially beautiful at first (of a most brilliant scarlet and brown) faded to a dirty combination of pale olive green and brown, scarcely recognizable had the fish not been marked in a distinctive manner at the beginning of the experiment. The whole of these color changes were effected within the remarkably short period of a week.

It may be that these instances of color assimilation carry the key to the problem of color variation or rather mimicry in the prawn *Hippolyte* (*Virbius*) *varians*.

Plaice (*Pleuronectes platessa*) have also shown rapidity of color change much more marked than I was prepared for. Some that were placed in a large shallow tidal pond where the color of the bottom varies considerably and where a portion is often in deep shadow, show change from a uniform gray to a well marked and intensely dark blotched appearance within a few seconds. Indeed, it is quite chameleon-like, so quickly is the transformation effected. In ordinary tanks, where the light and color of the sand are stable, the plaice soon take the exact coloring requisite, and retain it without alteration so long as they remain in the particular tank.

The Sense of Smell in Fishes.—It is well known that the sense of smell in fishes is very keen, and that all use it more or less in feeding, whether or not sight aids them in the process. Some further experiments on the subject have been made by Mr. Gregg Wilson in the Plymouth Marine Biological Association, and the following observations from his recent report to the British Association will be read with interest:

"So far as I could determine, fish that are not very hungry habitually smell food before taking it. The pollack seems usually to be ready for a meal, and on almost all occasions when anything eatable is thrown into the tank in which it is swimming it rushes toward it and bolts it. It does not hesitate to take stale food or food that has been steeped in strong smelling fluids; and time after time I have been amused to see its too-late repentance, after it had swallowed clams that had been saturated with alcohol, chloroform, turpentine, etc. It is only when it is satiated with fresh food or disgusted with what is nauseous that it takes the precaution to smell before eating. On the other hand, various fish that are equally keen-sighted, and habitually recognize their food by the use of their eyes, are more prudent. The whiting (*Gadus merlangus*), for instance, appears to pay much more attention to smell, and, as a rule, turns about and withdraws on approaching within a few inches of high-smelling objects that the pollack would take without hesitation. Even whiting, however, cease to be delicate if they are very hungry, and if other fish are present to compete for the food that is thrown to them. In such circumstances bait that is very distasteful may be taken by even the most cautious of sight feeders; and likewise, in such circumstances, a quite smell-less artificial bait may be successfully employed. Where large shoals of fish are, there are likely to be many that are very hungry, and the consequent keen competition will lead to hasty feeding by sight alone; and hence it is probably that lead baits are successfully employed in cod fishing in the Moray Firth and off the Northern Islands, while

they are of no avail among the scanty fish further south.

"It may be said that in these cases the fish actually search for their food by sight alone, and merely test the quality of what they have found by smelling it; and Bateson quite recognized this. But more is possible, *habitual sight-feeders can be induced to hunt by smell alone*. The pollack, which is such a pronounced sight-feeder that it will take a hook baited with a white feather or a little bit of flannel and trolled along the surface, is yet able, when blinded, to get his food with great ease. Several blind specimens in the Plymouth tanks were carefully watched by me; and I had no difficulty in deciding that it was by smell alone that they found their food. Their conduct was exactly such as was seen in the smell-feeders, to which I shall presently refer.

"Again, the cod (*Gadus morrhua*), which Bateson puts among the sight feeders, is generally believed—and with good reason, I think—to feed more by night than by day; which suggests that it, too, not only tests its food, but actually hunts by smell.

"Lastly, in this connection, I would state the results of my experiments. I worked with a number of fish, and always with the same success, but I shall here refer only to one case—that of the dabs (*Pleuronectes limanda*). That they were sight-feeders was evidenced by their behavior when I lowered a closed tube full of water, and with a worm in the middle of it, into the tank; time after time they bumped their noses against the glass at the very spot where the worm was situated. That they could also recognize the smell of food, apart from seeing it, was demonstrated in various ways.

"First, if instead of a closed tube, as in the last mentioned experiment, one open at the bottom was used, after a short interval the nosing at the part where the worm was seen ceased, and the lower end of the tube, from which, doubtless, worm juice was diffusing, was vigorously nosed. If, again, instead of putting worms into a tube, I placed a number of them in a closed wooden box with minute apertures to let water pass in and out, there was a similar excitement produced, and the dabs hunted eagerly in every direction. When water in which many worms had lain for some time was simply poured into the tank through a tube that had been in position for several days, and by a person who was out of sight of the dabs, the results were most marked. In a few seconds, hunting began, and in their excitement the dabs frequently leaped out of the water, apparently at air bubbles, and, on one occasion, one even cleared the side of the tank, which was about two inches above the water, and fell on to the floor of the aquarium. Yet there was nothing visible to stimulate this quest."

Peroxide of Hydrogen as a Disinfectant.

The disinfecting properties of peroxide of hydrogen have long been known; but considerable additions have recently been made to our more exact information as to its bactericidal action. Its hygienic importance, especially in regard to its action upon bacteria in water, has been shown by the interesting experiments of Van Tromp and Althoefer, to which reference was made in a recent number of *Nature*. According to the former, an addition of peroxide of hydrogen in the proportion of 1 part in 10,000 parts of the water, when shaken up and allowed to stand for 24 hours, is usually sufficient to sterilize a water. Althoefer, however, found that, to insure sterility, it was advisable to use larger quantities—viz., 1 part in 1,000 parts of the water. Experiments made with waters purposely infected with cholera and typhoid bacilli, respectively, showed that in both cases these organisms were destroyed after 24 hours by this proportion of peroxide of hydrogen. Althoefer, moreover, specially mentions that he found this addition in no way interfered with the dietetic value of the water; and he recommends its application for household purposes as a protective measure during any epidemics of typhoid fever and cholera. Traugott also testifies to the innocuous character of this material, even when swallowed in large doses. Care must, however, be taken that it is as pure as possible; moreover, it is important that the sample should be freshly prepared, as its strength and consequently bactericidal action is reduced when preserved for some time.


How Many Bees Make a Pound?

This question is answered in a recent number of the *American Apiculturist*. Careful weighing shows that an ordinary bee, not loaded, weighs the one five-thousandth part of a pound; so that it takes five-thousand bees, not loaded, to make a pound. But the loaded bee, when he comes in fresh from the fields and flowers loaded with honey or bee bread, weighs nearly three times more, that is to say, he carries nearly twice his own weight. Of loaded bees there are only about 1,800 in the pound.

An ordinary hive of bees contains from four to five pounds of bees, or between twenty thousand and twenty-five thousand individuals; but some swarms have double this weight and number of bees.

AN IMPROVED ROTARY ENGINE.

This engine, recently patented by Mr. O. E. Morse, of Dillon, Montana, is designed to utilize the steam to the fullest advantage, and the engine is readily reversed by simply shifting the lever to change the position of the slide valve. Fig. 1 is a view in perspective and Fig. 2 a side sectional view. On the driving shaft, within the cylinder, is secured the hub of a wheel containing a series of four pistons fitted to slide in the rim of the wheel, the opposite pistons being connected in pairs at their inner ends by a slotted frame through which the shaft passes, so that the pistons have free radial movement, one moving inward as the other moves outward, and *vice versa*. The outer ends of the pistons engage the inner surface of part of the cylinder and part of an abutment in the cylinder, an inverted plan view of which is shown in Fig. 3. The abutment is preferably made in two parts, bolted at their outer ends to the cylinder, and connected with each other at their inner ends by bolts and intervening packing strip, and the abutment serves to press an outermost piston inward, so that its opposite mate slides outward into contact with the peripheral inner surface of the cylinder. In the abutment are two openings into which lead four ports opening into a steam chest containing a slide valve having a single port adapted to connect with the two inner ports, the side ports connecting with compartments from which lead the exhaust pipes. The valve stem of the slide valve is pivotally connected with a lever adapted to be locked in any desired position on a segmental arm. As shown in Fig. 2, the slide valve port admits steam through only one of the live steam ports of the cylinder, and the exhaust takes place through the exhaust port at the right, but when the engine is reversed, by swinging the lever outward, the slide valve is shifted to close one of the live steam

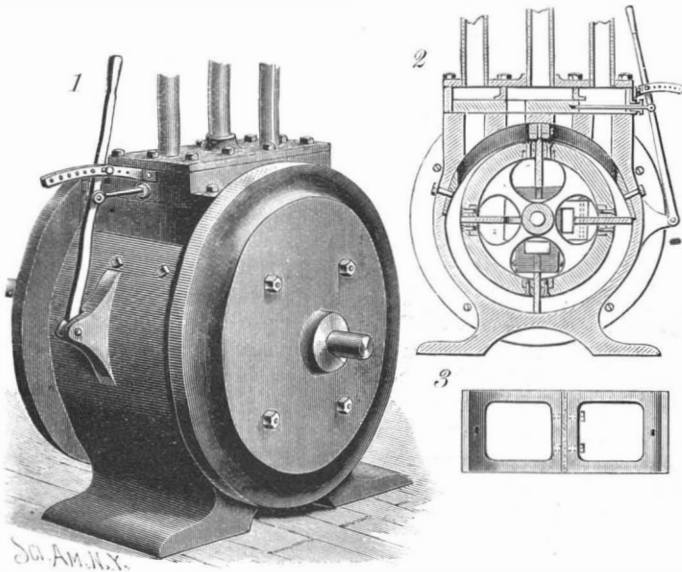


MORSE'S ROTARY ENGINE.

ports and open the other, and the exhaust then takes place through the exhaust port at the left.

IMPROVED CROSS-CUTTING SAW.


The cross-cutting sawing machine which we illustrate on this page, from *Engineering*, has been constructed by Messrs. F. W. Reynolds & Co., Southwark, London, S. E. As will be seen, it is belt-driven, and can accordingly be worked by any portable engine, thus allowing trees to be cut to length in the forest in which they are felled. The saw is fixed at one end of a cross-head working in guides. This cross-head is driven by a connecting rod which couples it to a disk crank as shown. The saw is long, and when driven at the rate of 150 double strokes per second, will cut through a log 4 ft. in diameter in from 7 to 8 minutes. It cuts on the return stroke only, and the feed is given by the worm and sector shown behind it in our engraving. The timber while it is being cut is steadied by a dog, coupling it to the framework of the machine.

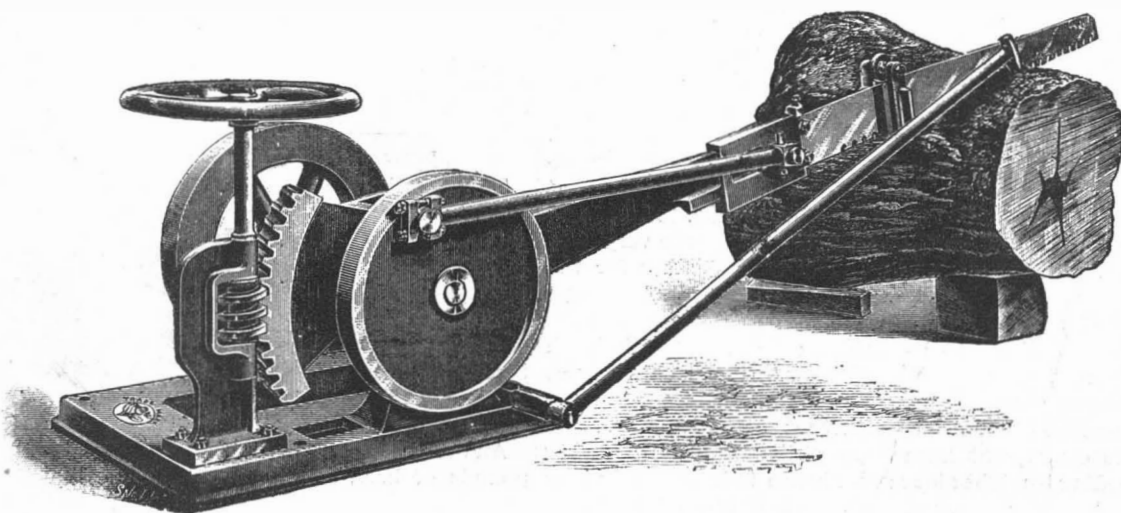

IMPROVED CROSS-CUTTING SAW.

A READILY ADJUSTABLE CAMERA STAND.

The illustration represents a metal telescopic stand, which can be readily knocked down to be shipped, and the only tool needed in setting it up is a hand wrench. It has been patented by Mr. John H. Green, of No. 604 Pine Street, Ishpeming, Mich. The trian-

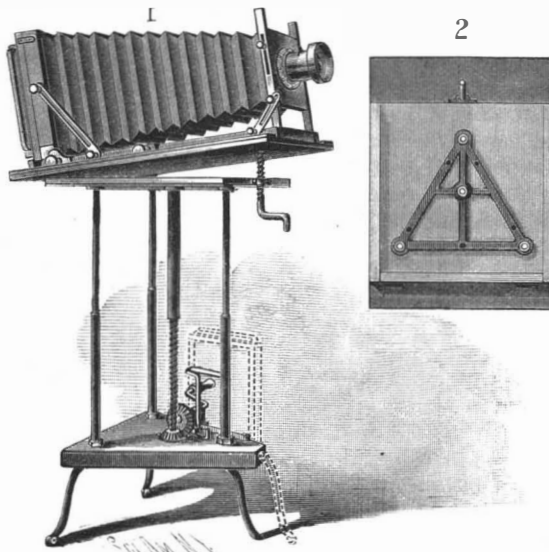

GREEN'S CAMERA STAND.

gular base piece has three permanent legs, two of them having casters to facilitate moving the stand, while a socket is provided in which may be inserted another leg having a caster, as shown in dotted lines in Fig. 1. Tubular standards near each corner of the base piece are adapted to receive depending guide rods whose upper ends are affixed to a carrier plate, a bottom plan view of which is shown in Fig. 2. Centrally in the base piece is vertically supported a coarse screw cut rod adapted to be rotated by a crank and bevel gear and pinion, the screw engaging a nut in a guide tube centrally dependent from the carrier plate, whereby, on turning the crank, the carrier will be raised and lowered, a pivoted locking arm being swung into engagement with the bevel gear when the carrier has been raised to the required height, and is to be locked in fixed position. A leaf with ledges or flanges on three sides, and adapted to support the camera case, is hinged on the upper surface of the carrier plate, the leaf being raised as desired, at the edge opposite the hinges, by means of an adjusting screw having a crank handle. As will be seen, with this improvement, the camera may be quickly raised or lowered, as necessary to suit the height of the person or object to be photographed, and the case or lens readily adjusted to any desired degree of inclination. Frame pieces on the base piece are adapted to support a plate-containing box, as indicated in dotted lines in Fig. 1, while the operator is adjusting the camera.

Photographing the Vibrations of Tall Buildings.

Professor Steiner, of Prague, has perfected a method of accurately measuring bridge and floor vibrations by the aid of photography. His process is a delicate one, and is an application of the chrono-photographic process of M. E. J. Marey, of the Institute of France. He uses little glass balls, and these are strongly illuminated, either by a solar ray, or by an electric arc light, or a magnesium light.

These balls give upon a photographic negative a clear and well-defined point. To register vibrations one of these glass balls is fixed at the point to be examined, and the photographic apparatus is then so set up that the image of the ball falls on the right edge of the plate. The plate is exposed at the moment the movement commences, and at the same time the camera

is turned from right to left on a pivot. The negative then shows an undulating line which is the vibrations of the ball point in amplitude and duration.


To obtain a scale with which to read this undulating line, a second ball is suspended to a fixed point, to which is given a known rate of oscillation. The position of these two balls is such that their images coincide in a state of rest, and a comparison of the trace of the second ball as printed upon the line of the first on a negative gives the number of vibrations of the latter in a given time.

It is possible then to place near the first ball a fixed scale brilliantly illuminated like the ball itself, and as this scale appears on the negative the amplitude of the oscillations can be measured at a glance. The measurements may be made either directly upon the print or from an enlargement made in the usual manner. To avoid the practical difficulty of making the images of the two balls coincide at the beginning of the operation, Professor Steiner says a pendulum may be made to oscillate before the source of illumination of the ball.

The ball of this pendulum will pass before the light at regular and determined intervals and the undulating line on the negative will be broken at distances corresponding to the duration of an oscillation of the pendulum. It is not important that the camera turns upon its axis with a uniform motion, and the speed of turning is likewise of little importance. The relations of the curves traced by the two balls will always remain the same. It is suggested that an apparatus of this kind would be useful in studying the vibrations of the floors of buildings resting for some years on iron beams, especially when these floors are submitted to the rhythmic shock of dancing.—*Le Genie Civil*.

AN EXTENSIBLE ELECTRIC LIGHT SUPPORT.

This improvement, patented by Mr. Alvin Rivenburgh, of Greenfield, Iowa, consists of a tube containing strips of conductive metal connected with the wires of the house circuit, a tube of insulating material sliding therein, and having contact springs contacting with conductors leading to the lamps through the sliding tube. Fig. 1 shows the electrolier complete, Fig. 2 being a transverse section, and Fig. 3 the top portion of the sliding tube. The hole in the main tube is preferably rectangular, and the metallic strips in its opposite sides are flat. The springs contacting with the

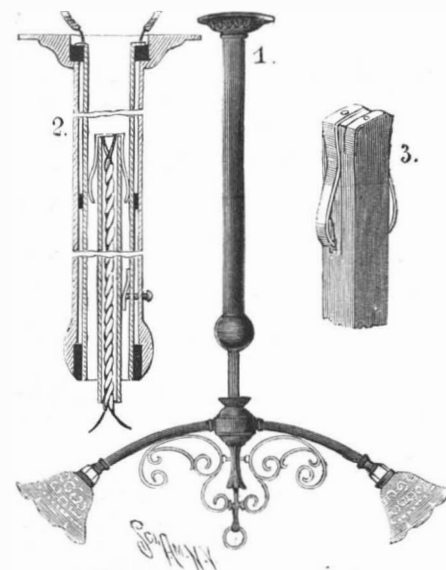

RIVENBURGH'S ELECTROLIER.


strips, on the upper end of the sliding tube, are insulated from each other and connected with the wires extending down the inner tube and leading to the lamps. Additional strips of insulation are inserted in the walls of the main tube to prevent the springing of the metallic strips, and, to hold the sliding tube in any desired position, a spring and a set screw which may be made to bear upon it are arranged in the side of the main tube.

Artificial Diamonds.

At the Academy of Sciences, M. Moissan announced recently that, in continuing his researches on the synthesis of the diamond by means of the electric furnace, he has just obtained two compounds well worthy of attention. These bodies are silicide of carbon and boride of carbon. They are of excessive hardness, and cut rubies, steel or diamonds. M. Berthelot asked M. Moissan if in the researches made previous to his own on the subject of artificial diamonds, chemists had not sometimes mistaken for diamonds very dense compounds similar to those to which reference had just been made. M. Moissan replied that he believed errors of the kind might easily occur when analysts are not exactly acquainted with all the characteristics of diamonds. By only bearing in mind their density and property of cutting all other gems, errors may frequently have been made. But, being at present aware of the characteristic of diamonds to burn in oxygen, and to produce four times their weight of carbonic acid, it is now difficult to confound them with any other body.

A COIN HOLDING AND DELIVERING DEVICE.

A convenient means for carrying assorted pieces of money, and delivering the coins one by one as required, is shown in the picture, the device being adapted for suspension upon the person by means of a strap, or to be fixed in position for store use. The improvement has been patented by Mr. Ernest Berrini, of Seattle, Wash. The case has a forwardly inclined, hopper-like bottom, with an outwardly swinging door, an upwardly extending key or lever, by which the

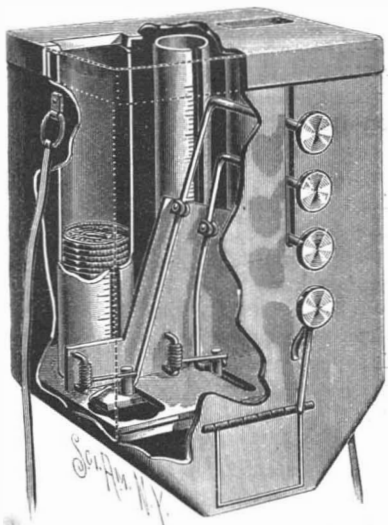

BERRINI'S COIN HOLDER AND CHANGE MAKER.

door may be opened, terminating in a fingerpiece, the key being normally pressed outward by a spring, which also holds the door closed. In the removable cover of the case are slots, through which coins may be passed to the coin tubes, which are removable, and any desired number of tubes may be used. Each tube has a vertical slot on one side, through which the coin may be seen when the tube is removed, and at the side of the slot is a graduated scale, by means of which the amount of money in the tube may be determined without counting. Beneath each tube is a slide moving horizontally between two base plates, each slide having a hole of the same diameter as the bore of the tube, so that the bottom one of the coins placed in the tube will drop into and occupy the hole in the slide and lie flatwise on the lower base plate. Each slide is normally pressed back beneath the tube by a spring, but when a slide is moved forward by pressing upon the lower finger piece. Upon a plate at one side of the tubes are fulcrumed tilting keys connected with the slides, and whose upper ends are bent outward through a slot in the case, where they terminate in finger pieces, which should be appropriately marked to indicate the denomination of the coin in the tube with which they are respectively connected. When the device is arranged for use in a store, a bell crank adapted to sound a gong is connected with the key by which the door in the hopper is opened, thus giving notice when the door is opened or any money is withdrawn.

Ebonite Packing Rings.

The pistons of the high pressure air compressors of the pneumatic tramway of Bern are packed with ebonite rings, which, like cast iron rings, fit in grooves, and are pressed against the cylinder sides by a double brass spring. Pistons thus packed are said to be tight, to last from three to four months, and to be cheap, and there is no wear of the cylinder sides.

A QUICK AND SURE CHICKEN BEHEADER.


The illustration shows a device for severing the head from the body of a chicken by simply pulling a trigger, without torturing the chicken or trying the nerves of the sensitive. The improvement has been patented by Mr. J. C. Denham, editor of the *Journal of Agriculture*, 1120 Pine Street, St. Louis, Mo. The barrel of the implement incases a main spring, and at its rear end is clamped by a breech block having upwardly extending flanges, forming guides for the knife, the flanges being recessed in the center to afford space for placing the neck of the chicken, and the beheading knife sliding across this space between the flanges. The knife is inclined, and its lower end slides in a slot in the top of the barrel, where it is secured to a sliding plunger, to which one end of the main spring is attached, the other end of the spring being secured to the barrel. In the front end of the barrel is a cushion, against which the extended shank of the plunger strikes, absorbing shock and limiting the forward movement of the plunger and knife. The plunger and knife are pulled back against the tension of the spring by handles on the sides of the plunger, the handles projecting through side slots in the breech block and barrel. A notch in the bottom of the plunger receives a pawl on the front end of a curved trigger, by which the knife and plunger are held in a rearmost position when the device is to be used. A depending hook or flange on the front end of the barrel may be hooked upon some object to facilitate pulling back the plunger, or to steady the implement when it is used. When the neck of the chicken is placed in the space provided therefor, and the trigger is pulled, the plunger is instantly released and the knife drawn rapidly forward, the cut being effected with certainty, neatness, and dispatch.

NEW FIRE ALARMS.

A few years ago we described the fire alarms that were being put in service in the streets of Paris. It was a question of an alarm upon a column, due to Mr. Petit, and in which a button pressed by a person asking for help actuated a bell and a clockwork that gave a signal at the engine house along with the number of the alarm brought into play. While offering decided advantages, this system was defective in some points. The firemen always had to proceed to the

alarm whence the signal came in order to ask exactly where the fire was, and they did not know its nature.

So, while installing the Petit apparatus, the fire department, and particularly its eminent engineers, Commandant Krebs and Captain Cordier, set about to find something better. The ideal was to be able to permit the public to telephone to the engine houses all the details of the location, extent and nature of the fire. Unfortunately, the practice of telephony is still unfamiliar to many persons, and consequently what was necessary was an absolutely automatic apparatus that would attract the attention of the station by a bell, making known to the person calling that the indications given were understood. A very ingenious apparatus, due to Mr. Digeon, has been under trial for some time,

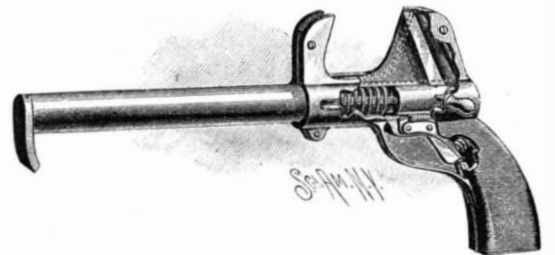

DENHAM'S CHICKEN BEHEADER.

and, having proved successful, has been rapidly put in service in a large number of quarters.

As to external aspect, this new apparatus differs but little from the Petit system. Like it, it comprises a square box painted red, mounted upon a column in the shape of a lamp post. The alarm and telephone, inclosed in the box, communicate, through wires running to the interior of the column, with two cables coming from the central station through the sewers. Let us walk around the apparatus: Here is the door, into which is set a small glass. At the top of the door we read: "In case of fire, break the glass and then cry out distinctly in the mouthpiece of the telephone the nature of the fire, the street, and the number" (Figs. 1 and 2). The normal type of alarm is provided with a small hammer like a door knocker, which permits of effecting the breakage of the glass, but this has been removed, since it gives rise to mistakes. Let us strike

hard, as another inscription tells us to, and, according also to these same instructions, the door will open and reveal the mouthpiece of the telephone placed in the interior. This opening, in fact, reveals itself to us at the bottom of the box, surrounded by the inscription in exergue: "Mouthpiece of the telephone." The directions are intelligently multiplied throughout the apparatus, and the most excited person cannot fail to see them. When the door opens, a ringing occurs that attracts the attention of passers-by and points out jokers. If we take a look at the enameled iron plate at the bottom of the box, we see that, as soon as the ringing ceases, we must shout in the telephone the fire that it is necessary to fight, and repeat this information until a roaring sound is heard, and which signifies that the firemen have started. After following these instructions to the letter, we can leave the apparatus, whose door remains persistently open. There is nothing more simple than all this, even for a child.

When a person breaks the glass he bears at the same time upon a metallic plate that swings upon a horizontal hinge above, and this motion disengages the bolt of the door, which opens through the pressure of three springs. A very simple play of levers frees the alarm bell, which is analogous to that of the old apparatus; but, at the same instant, this opening of the door sets in motion

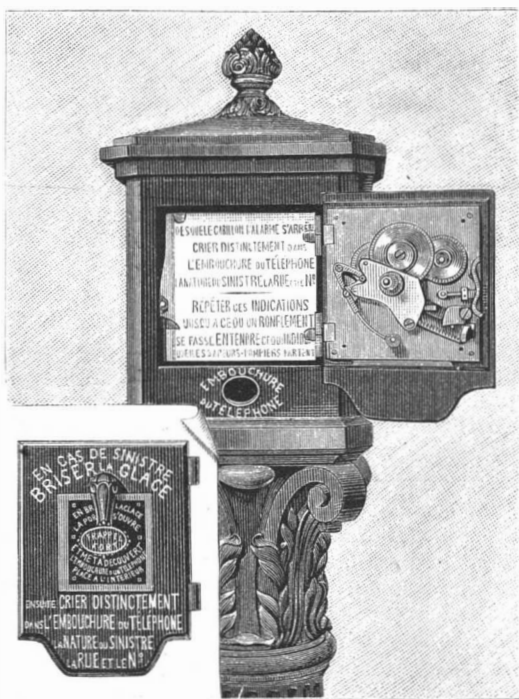


Fig. 1.—NEW FIRE ALARM.



Fig. 2.—MANEUVER OF THE APPARATUS.

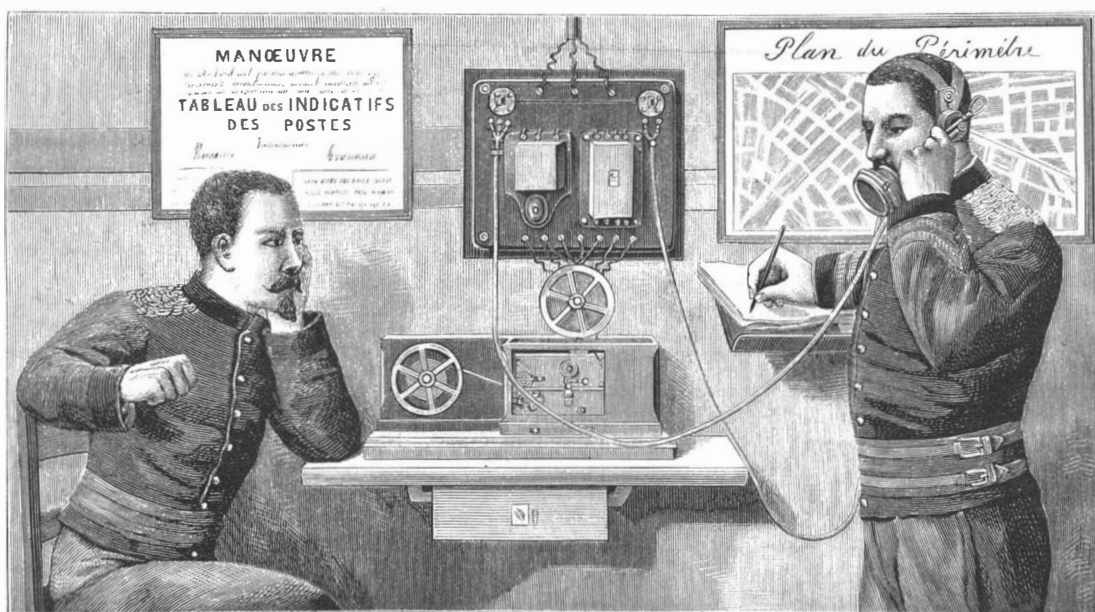


Fig. 3.—RECEIVING APPARATUS IN AN ENGINE HOUSE.

the automatic transmitter of the indications of the letter of the alarm and of the name by which it is recognized. This transmitter, which is not very complicated, comprises, in the first place, a cam wheel carrying three times upon its circumference, in Morse characters, the indicating letter, and secondly, a motive weight whose card is wound around the axis of the wheel, and causes it to make an entire revolution when the door opens. The play of a lever is controlled by the cams. At rest this lever communicates with the ground through a movable arm and a special spring. Every passage of a cam lifts a tappet and brings the lever in contact with a special screw for a greater or less length of time, according as it is a question of a dot or a dash. The circuit is completed by the earth, and a Morse receiver located at the engine house inscribes a dot or a dash, and finally the letter (or rather the letter three times) characteristic of the alarm.

At the engine house, at the moment at which the first emission of the current occurs, as a consequence of the opening of the door of the box, a bell is heard to ring to call the foreman. At the same time, through an original mechanism that we cannot describe, the Morse receiver is freed automatically, and inscribes the indicative of the calling alarm. After the triple inscription of the letter A (—), if it is a question of the apparatus of Chateau-des-Rentiers Street, the fireman unhook his telephone, and this movement interrupts the bell of the alarm. The person who is calling knows then that he can signal the fire in the telephone. At this moment a pin fixed upon the cam wheel has lifted the movable arm, made it tilt, and put the telephone in circuit. The fireman inscribes the indications given, and when they are very clear he depresses a special lever, introduces the current of the battery upon the line, and, thanks to an interrupter, the telephone of the alarm renders a sound announcing to the person interested that the firemen are apprised (Fig. 3).

All the maneuvers are, therefore, very simple. But the Digeon apparatus has other advantages. It permits notably of keeping the men who have started for the fire in communication with the house, in order to ask for re-enforcement, for example. In fact, every alarm is provided at the side with a door that is opened with a special key and exposes a jaw into which are introduced the wires of a movable telephone and a Morse key to effect calls. We must not omit to mention particularly the movable telephone that is employed in this case. It is due to Commandant Krebs, like the one that is arranged in the alarm. It is a question in both cases of a remarkable magnetic transmitter. The vibrating plate is 98 millimeters in diameter in the stationary apparatus and 77 in the movable. For the latter, it is coupled with the Ader receiver mounted through a slide upon the junction rod.

Let us say further that Mr. Digeon has devised a low priced alarm designed for private houses. It is of wood, is fixed against a wall and is wound up through the opening of the door. Besides, the telephone is accompanied with two receivers that permit of communicating with the engine house. These apparatus can be connected gratuitously with the municipal system.

It is opportune at the moment in which Paris is thus improving its fire service, to remark that Brussels, our closeby neighbor, possesses a very remarkable installation of electric alarms. Forty bureaux of communal administration are subscribers to the telephone system. There are fifty automatic electric fire alarms connected with twelve receiving stations. Twenty-one telegraphic stations connect the police offices and stations with the central office, and at the latter there end eighteen telegraph lines coming from the police stations of the seven faubourgs. It is necessary to add to this thirty-seven microphone and eighteen telephone stations putting the services of the external administration in communication with the City Hall. It will be understood that these are so many stations capable of serving to send out alarms of fire.—*La Nature*.


Determining the Densities of Gases.

A recent number of *Nature* contained the following notice of a convenient modification of the hydrometer method of determining the densities of gases, devised by M. Meslans, whose apparatus is described and illustrated in the *Comptes Rendus*. It consists of two hollow spheres hung to the arms of a balance. Each sphere, which is made of glass, aluminum, or gilt copper, hangs in a separate compartment, the suspending thread being introduced through a hole in the lid. The compartments are inclosed in a box, and surrounded by water in order to keep them at equal temperatures. They are at first filled with air to determine the position of equilibrium. The gas of which the density is to be determined is then introduced through a long tube immersed in the water, and enters one of the compartments, having previously been dried. It is passed through in a slow and continuous stream; and if its density differs from that of air, the equilibrium of the balance is disturbed. The weight necessary to re-establish equilibrium is noted, and the density calculated according to a simple formula. Thus

the density of a particular gas is found by a single weighing; and by keeping the current continuous, variation in its density is easily observed. A fairly high accuracy is attainable, depending upon the sensitiveness of the balance and upon the perfection of gauge of the spheres. One important application of the apparatus is that for determining the density and composition of the products of combustion in furnaces. The scale of the balance is graduated so as to show at a glance the percentage of carbonic acid, and hence the degree of efficiency of the furnace in question. This percentage, which is about 21 theoretically, never exceeds 18 in practice, except in gas generators. In a great number of works it varies between 6 and 8. The apparatus is being applied to the study of the various methods of heating. Another application is that by which the presence and percentage of marsh gas is indicated. With spheres of 1 liter capacity and a balance sensitive down to 0.5 milligramme, it was found possible to detect 0.1 per cent of methane in the air of a mine.

A METALLIC BOOKCASE.

The illustration shows a simple form of bookcase or stand adapted to rest upon a bureau, desk or table, and contain a set of works or books of reference in frequent use, the number of volumes being regulated by the length of the stand. The improvement has been patented by Dr. James Stimson, of Watsonville, Cal. In its simplest form the base may be formed of a single piece of metal and struck up with a die, a single piece of metal also forming each of the end pieces. Near each end of the base is a transverse slot, along the outer edge of which the metal is sunk or depressed to form a step or recess, as shown in the small view. The clamping arms forming the end pieces are essentially L-shaped, but with a stepped angular portion connecting the horizontal and vertical portions, the arms

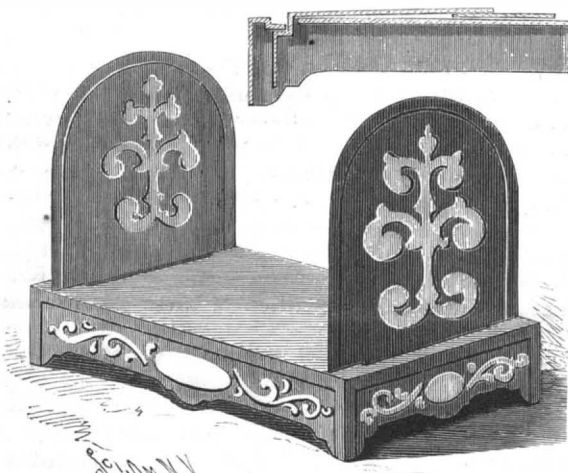

STIMSON'S BOOKCASE.

when not in use folding down upon the base and upon each other, enabling the stand to be compactly folded and stored away. In use, the upper members of the arms are brought to a vertical position, as shown in the large view, the inner members then engaging the under face of the base.

Fire-Resisting Glass.

An interesting test of fire-resisting materials and construction was recently carried out in Berlin, under the auspices of the fire brigade and the insurance companies of the city. The idea of the tests was mooted as far back as 1889; but there was considerable difficulty in arranging for a series of "fires," which were intended to be as "natural" as possible, and yet should not be dangerous. Finally, the municipality gave the experimenters the use of an old warehouse for their purpose; and this building, having been fitted up to represent various types of fire-resisting structures, was duly set on fire. Care was taken to subject the exhibits to the temperatures, irregularities of heating, sudden shocks by falling weights or jets of water, etc., which generally occur at conflagrations; and it was found possible to take fairly exact observations. Among the most satisfactory results obtained were with the fire-resisting glass made by Messrs. Siemens, of Dresden. The assessors declare it to be most suitable for any skylight or window necessary in a division between separate risks, as it will resist a temperature of 1,300° C. for half an hour and more; bearing all manner of shocks and strains without suffering appreciable damage. Care is required in fixing this glass, however, as the iron frames generally used for the purpose buckle under heat, and show, between the glass and iron, openings through which flame can pass. Some of the so-called fireproof floors made of iron girders and concrete came to speedy grief in these tests; while iron and brick floors stood very well, as did the "Monier" construction (as to which reference has been already made in the *Journal*). As regards fire-proof doors, nothing stood better than double oak covered with thin sheet iron, between which and the wood there should be a layer of asbestos cloth. Seeing how many

warehouse fires are propagated through windows, the assessors attach great importance to their demonstration of the capability of Siemens glass for withstanding flame.

No Oxygen in the Sun.

At the recent annual meeting of the five academies in Paris, M. Janssen read a paper on his observations at Mont Blanc Observatory on September 14 and 15, as to the absence of oxygen in the solar atmosphere. This discovery, he said, revealed a fresh harmony in the constitution of the universe.

"We already knew the chief features of the constitution of the sun and the admirable conditions realized for insuring both the abundance and the durability of the radiation diffused by it over the planets surrounding it. We knew that this incandescent surface of such a slight thickness which surrounds the sun and in which resides this virtue of radiation renews itself by reserves of heat drawn by it from the central mass. We also knew that this radiating surface is protected from contact with the icy celestial space by several gaseous envelopes. Among these envelopes or atmospheres the uppermost and doubtless most effective as to protection is the so-called corona, which in total eclipses produces the splendid phenomenon of the 'glories' and of the crown. This atmosphere is mainly composed of hydrogen, the lightest and most transparent of known gases. The chief function of radiation, the very purpose of the central orb, is thus insured by this transparent and protecting atmosphere. But we now see that by a not less admirable arrangement the body which might some day jeopardize this function has been carefully excluded. Thus science as it advances constantly reveals to us new laws and harmonies in the constitution of the universe."

Prizes for Electrical Inventors.

It can hardly be doubted, says the *Electrical Review*, that there will be a good number of American competitors for some of the following named prizes which are offered by the French Society. A prize of \$2,280 will be made in 1898 for the discovery that is most useful to French industry. A prize of the same amount is given every three years by the society (the next award will be made in 1895) to the person making the most useful industrial discovery. The Henry Giffard prize of \$1,140 is awarded every six years (the next award will be in 1896) for services of signal value to French industry. The Metzen's prize of \$95 is awarded every three years (the next award will be in 1896) to the discoverer of a valuable chemical or physical application in electricity, ballistics or hygiene. The special prizes for 1894 are: \$380 for a motor whose weight is not less than 50 kilogrammes per horse power; a prize of \$570 for an apparatus that shall decrease materially the smoke of furnaces, especially those under boilers; a prize of \$190 for a heavy oil engine; a prize of \$570 for a steam engine consuming at the maximum speed, under average load, seven kilogrammes of steam per horse power per hour; a prize of \$570 for the discovery of a substance that can be substituted completely for gutta-percha in at least one of its applications, or for work that will continue to develop the production or improve the cultivation of the gum. The following prizes are to be awarded in 1895: A prize of \$380 for a small motor designed for use in a shop located in a house; a prize of \$380 for the preparation industrially of ozone and means for its application; a prize of \$380 for an apparatus or a process which shall make it possible to measure or determine the insulation of the different parts of an electric installation while the current is on; a prize of \$570 for investigations which shall contribute to the discovery and application of the best means in domestic and general product for the purification of drinking water. Competitors must submit their proofs by the 31st of the December preceding the year on which the prize will be awarded.

Hydrogen.

An interesting example of the capacity of some of the oldest and most hackneyed chemical reactions for improvement is supplied by a communication of Mr. John Ball, of the Royal College of Science, South Kensington, to the *Chemical News*, upon the preparation of hydrogen by the ordinary zinc and acid laboratory apparatus. Mr. Ball states that he has recently observed that, by the addition of a few drops of a solution of nitrate of cobalt to the acid and zinc, the rate of evolution of hydrogen is enormously accelerated, especially at the beginning of the reaction. The effect is the same with either hydrochloric or sulphuric acid; and a couple of drops of solution of nitrate of cobalt will suffice for a large quantity of acid. The action does not seem to have been noticed before; and it should be useful in the rapid preparation of hydrogen in the laboratory. Most, if not all, of the cobalt salt is quite unaltered. There appears to be a very thin film of cobalt deposited on the zinc, which probably acts with the zinc as a voltaic couple; but the amount of cobalt deposited appears to be too small to weigh. There is no particular virtue in the cobalt in this regard; a solution of a nickel salt exerts a similar action.

IMPROVEMENTS IN SHAPERS.

Among notable exhibits at the World's Columbian Exposition at Chicago there was an improved shaper, which attracted attention in consequence of the enormous chips of metal which it cut from iron and steel. To the casual observer the machine does not appear to be different from the ordinary shaper, but to the mechanic who is used to tools of this kind it is a matter of surprise to see a shaper remove from a solid block of iron such chips as are shown in Fig. 1. This engraving is a truthful representation of the machine doing actual work; and Figs. 2 and 3 show respectively a very wide but comparatively thin chip and a narrower and much thicker chip, the first being one-sixteenth of an inch thick and one and three-fourths inch wide, the other being one-eighth of an inch thick and one inch wide.

The explanation lies in the fact that the tool does its work with a drawing cut. This insures great steadiness in the moving bar of the cutter, and as the tool holder is arranged, it also secures great rigidity and firmness in the holding of the tool without the necessity of heavy clamping devices, as the tool practically clamps itself as it is drawn forward. The up and down and cross feeds are not materially different from those of other shapers, and the cutting bar is moved by reversible gearing, with a quick outward movement and a slow return. By making use of the drawing cut instead of pushing the tool, less pressure is required in clamping the work and all chatter of the tool is avoided.

This machine is made by the Morton Manufacturing Company, of Muskegon Heights, Michigan, who also make other machines on the same principle.

The Loss of H. M. S. Victoria.

The vessels upon which we now rely for bearing the brunt of the fighting in a future naval war, which are styled by the imposing title of battleships, may, it appears—at least some of them—be sunk almost in a moment by a blow which is much less heavy than an enemy might be expected to give in action. Enormous sums are spent in providing armor to protect them against gun-fire, but the structure upon which this costly armor is placed is apparently so frail that a mere touch suffices to send the whole mass to the bottom.

We have always understood that the division of a warship into separate watertight compartments was so minute and complete that she would be safe against sinking, even if many of these were damaged. The Victoria could, however, hardly have been sunk quicker if there had been no division at all into what are called watertight compartments. Sir E. J. Reed, whose knowledge and capability of judging cannot be seriously questioned, named twelve other battleships in the House of Commons that he asserted would have the same fate under similar circumstances. We know of nothing which gives reasonable ground for supposing that Sir Edward Reed is wrong; but, whether he be right or wrong, it is not only the duty, but the interest, of the Admiralty to have this grave question inquired into by an independent and impartial committee of qualified judges. We would like to know why the numerous watertight compartments of the Victoria failed so completely to serve the purpose for which they were devised, *i. e.*, to keep the ship from sinking when injured below water. Was it because, as has been often stated, her stability is so small that the filling of one or two of these compartments is sufficient to overcome the floating power of the remainder? Or was it a question of watertight doors being left open, or not acting when attempts were made to close them? Captain Bourke's evidence before the court-martial shows that all was tight in the engine room and boiler rooms, and the water was all confined to the fore side of the boiler room bulkhead. It appears, therefore, that the watertight doors were very soon closed, although they may have been open before the fatal blow was given.

Lord Armstrong stated in his recent speech at Elswick that the loss of such a ship "calls for very grave reflection as to the policy of devoting so large a proportion of our naval expenditure to the construction of those mighty vessels called battleships." We agree with Lord Armstrong upon this point, if it be the fact that our battleships are in reality so frail and unreliable as the sinking of the Victoria would indicate. It would be absurd to glory in their "might" if it rested upon such an insecure basis as that. There is little, however, at present upon which to form a definite

of 2,099 ft. It is estimated that the projectile reached an altitude of 21,456 ft., and its flight occupied 70.2 seconds. The Krupps have had a drawing made showing the flight of the projectile relatively to Mont Blanc, from which it is evident that it would be possible for the gun to fire over the mountain from Pre St.-Didier.

Tuberculosis and its Prevention.


Dr. Anderson, the medical officer of health of Dundee, delivered an interesting address recently, so says the *Lancet*, with the view of quickening public interest on this important topic. After referring to the history of our knowledge of the specific germ and of the manner of its propagation, he mentioned the fact that tuberculosis had been calculated to cause one-seventh of the total mortality of the human race. It was remarkable that, notwithstanding this important fact, little practical interest had been taken in the matter by the state, local authorities, or individuals. An assumed theory of its unavoidable nature seemed to lie at the root of this baneful fatalism. Dr. Anderson maintained that all tubercle bacilli were derived from predecessors of the same character, and pointed out the facility with which this bacillus adhered to moist surfaces and propagated itself under insanitary conditions such as prevailed in the overcrowded houses of the poor. He also mentioned the opinion, held by bacteriologists, that the expired breath of those suffering from the disease was comparatively innocuous, while their sputum swarmed with bacilli, and on evaporation and desiccation was apt to become a fruitful source of infection. Hence the paramount necessity for a systematic destruction of the sputum, disinfection of apartments occupied by those suffering from tuberculosis and disinfection or destruction of articles of clothing likely to retain the germ. Referring to the large mortality from tuberculous disease, Dr. Anderson mentioned, as an instance of public apathy in the matter of its prevention, the fact that very few people applied for disinfection of material after death from this cause, in comparison with the numbers of those who took such precautions in the case of the various fevers. Passing to the subject of the disease in cattle, he pointed out the large mortality among these animals from this cause and also the relation of milk supply to infant mortality from tuberculosis. The proportion of deaths from this cause in children under five years of age in Dundee was found to be 1 in 11. All these facts pointed to the necessity for the householder to safeguard his own interests. Dr. Anderson concluded his instructive address by mentioning in detail the preventive and disinfectant measures necessary to secure the highest possible immunity from the scourge.

Our Birds are Leaving Us.

In *Harper's* Susan Fenimore Cooper sings a gentle dirge over the departure of the birds from our forests and hedgerows. Selecting a typical region in the Northern Alleghanies, she shows how the birds have gradually become silent, first the great white pelican on the mountain lake, then the beautiful wild swan, and finally even the myriads of wild pigeons. This last bird is one of the most curious examples of the sudden destructive blows to whole species that man's presence can give. Seemingly one of the most numerous and prolific of birds—flocks estimated to be 240 miles long have been seen in this century—it is now practically a thing of the past.

And as for the songsters, and the smaller feathered tribe:


"The friendly red-breasted robins, the beautiful blue-birds, the gay, musical goldfinches, those charming song birds the wrens, the gorgeous orioles, the purple finches, the dainty greenlets, the pretty cedar birds, the merry gold crests, and their cousins the ruby-crowns, those dainty sprites the humming birds—these and other bird families never failed in past years to bring joy with them to our lawns and meadows. Many of them are now rare visitors. The sturdy robins are much less numerous than they were formerly."

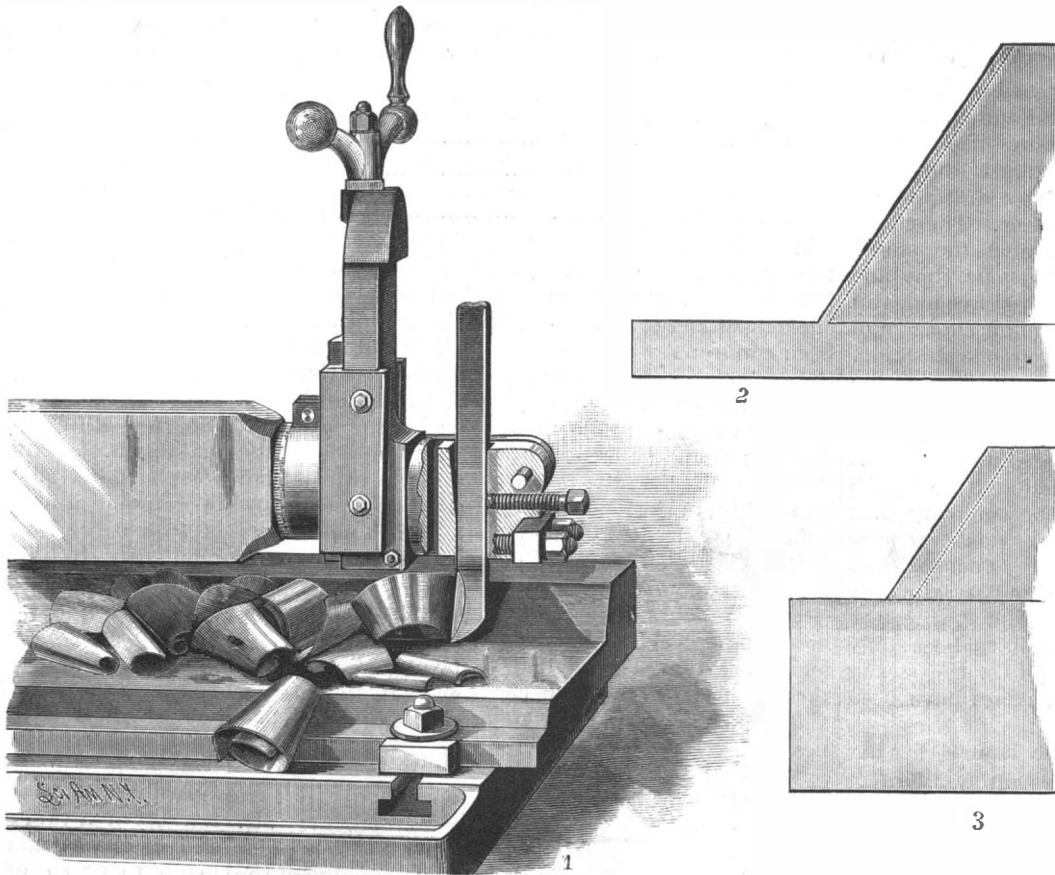

HEAD OF THE MORTON SHAPER SHOWING HEAVY CUT.

opinion upon the question, and no sign of the necessary information being furnished. We desire to know whether it be not practicable to build a battleship in watertight compartments so that no single blow would send her to the bottom; whether the Victoria was not believed to be so constructed, and whether she was so constructed in fact; whether other of our principal battleships are in the same case with the Victoria; whether the watertight doors were thoroughly efficient, and were capable of being readily closed from a safe position above water; and what is the best to be done in

order to make existing ships satisfactory in these respects, if they be not satisfactory now, and would be in danger of meeting the fate of the Victoria under like circumstances.—*Engineering*.

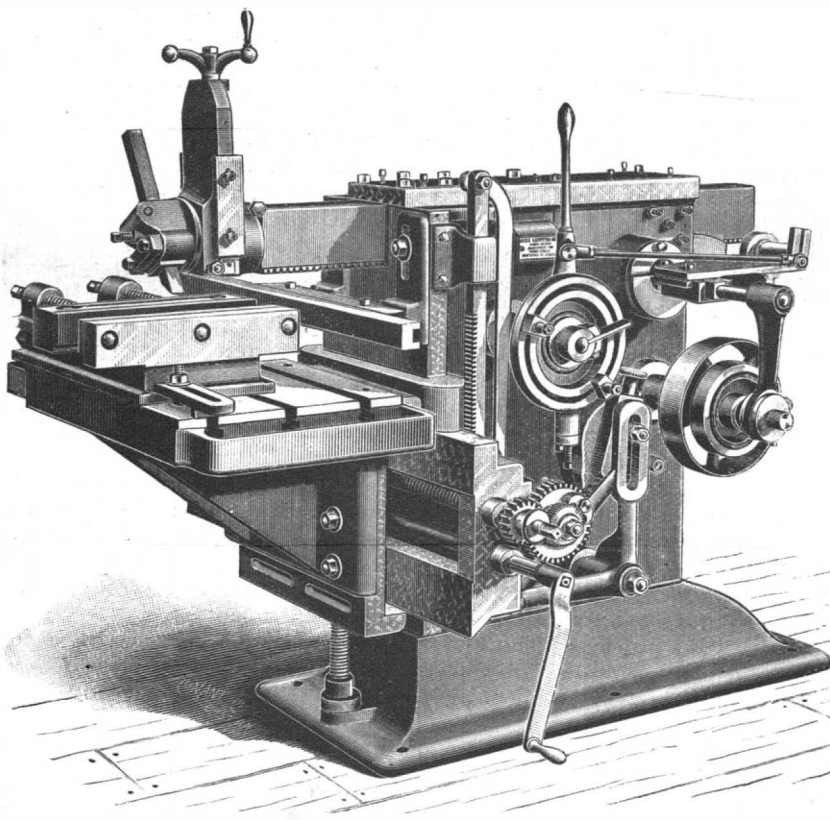

THE MORTON DRAWING CUT SHAPER.

A COAST gun built by Krupp, when being tested at the Meppen proving grounds recently, threw the projectile 65,616 ft., or nearly 13 miles, the gun having an elevation of 44 deg. The projectile weighed 474 lb.; the charge of powder 253 lb.; giving an initial velocity

FOUR HUNDRED HORSE POWER MILL ENGINE.


The engines which we illustrate below are of the inverted marine type, and are designed for driving cement and other mills, shop machinery, and for general land purposes. The chief advantages claimed for this type of engine over the ordinary horizontal land engine are economy in floor space occupied and greater balance of working parts. In the engine illustrated, this latter point has been especially studied, the cranks being placed opposite to each other, instead of at right angles, as usual. The engines are designed to develop four hundred horse power, the cylinders being 19 in. and 33 in. in diameter by 48 in. stroke. The fly-wheel is 16 ft. in diameter, and weighs 12 tons. The

use. The throwing of the images on the screen side by side necessitated great straining of the eyes in looking at them for any length of time; but the worst disadvantage is the loss of light through the colored glasses. In Anderton's lantern the two images, which may be made from any stereoscopic negatives, are thrown upon the same part of the screen, so that there is no trouble in seeing them. Looked at in the ordinary way with the naked eyes, they appear as a blurred, out-of-focus picture, in which the subject may be but barely distinguishable, for they are thrown from lanterns with prisms in front of the objectives to polarize the light, and as the slides are the two halves of a stereoscopic picture they could not be made

perfectly startling. The glass used by Mr. Anderton for viewing the images is like a very short opera glass on a handle, and with two small prisms suitable for his purpose cannot be a very expensive instrument.—*Practical Photographer.*

Reduction in the Price of Aluminum.

The Aluminum-Industrie-Actien-Gesellschaft, of Neuhausen, in Switzerland, owing to the increase of its dynamo capacity to 4,000 horse power, and some improvements in the processes employed, enabling it to increase largely the production of aluminum, announces that the price from January next will be 45 cents per pound. It must be remembered that, owing

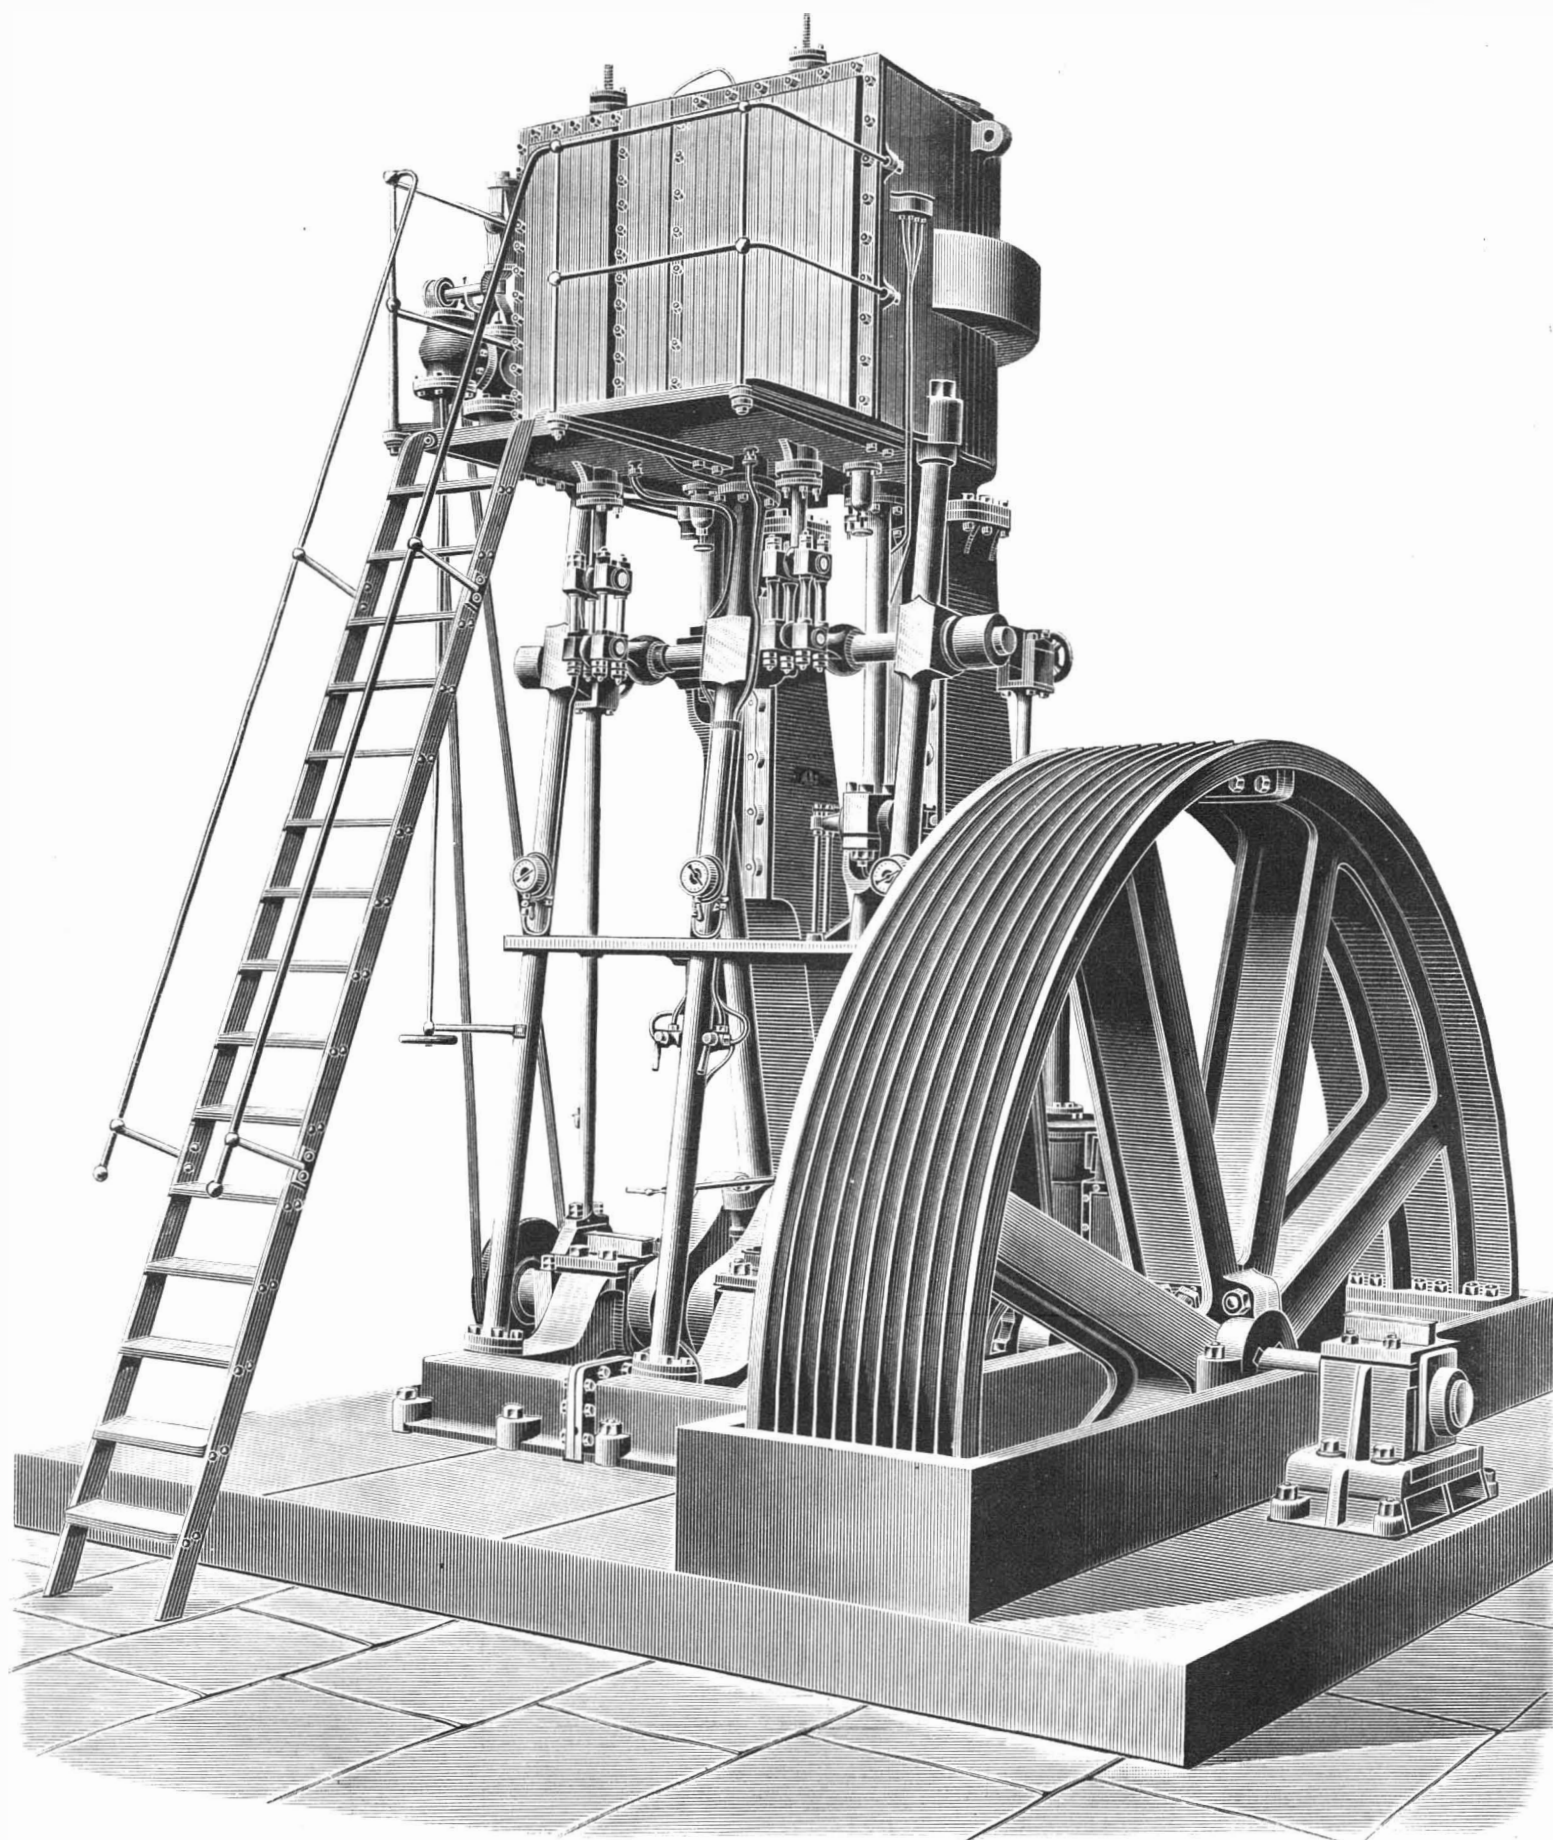**FOUR HUNDRED HORSE POWER COMPOUND MILL ENGINE.**

makers are Messrs. Ross & Duncan, Whitefield Works, Govan, Glasgow. We are indebted to *Engineering* for our illustration and the foregoing particulars.

A Stereoscopic Lantern.

Anderton's stereoscopic lantern, recently shown at the Pall Mall Exhibition, and demonstrated at one of the technical meetings of the P. S. G. B., is the most notable novelty that the lantern world has seen for many years. It has long been possible, in an experimental way, to show lantern pictures in stereoscopic relief by throwing the images from two lanterns through red and blue glasses respectively, and viewing them through opera glasses or spectacles in which the glasses are red and blue. This system has one or two disadvantages that have prevented its practical

to coincide, even if it were desirable. The prism used to polarize the light is placed horizontally in one lantern and vertically in the other. Practically either image is only visible when viewed by the naked eyes, or through a prism held parallel to the original prism through which it is thrown. Thus, when one looks at the blurred image on the screen through a prism held horizontally or vertically, one image is plainly seen and the other is practically invisible, and when a glass is used containing a horizontal prism for one eye and a vertical prism for the other, each eye sees one image only, and the stereoscopic effect is given by the blending of the two. The illumination is very good, the image from the two lanterns seeming about as well lighted as the ordinary projection from either one of them. The stereoscopic effect, from good slides, is

to the low specific gravity of aluminum, if equal bulks, not weights, of the different metals are taken, this price is really lower than that of copper as recently as 1890, and is less than that of tin at the present time. At present, 75 cents a pound is the ruling price for aluminum.

It is now pretty well understood that the contemplated race between the champion English and American locomotives, that were exhibited at Chicago, will not take place. Our British cousins decline to join in a contest in which they know, beforehand, they would come out second best. No. 999, of the N. Y. Central, is said to have made the rate of 112½ miles per hour, and no locomotive as yet produced in England has come up to that scratch.

The La Grange Dam.

Stanislaus County, Cal., will soon have the highest overflow dam in the world.

It is called the La Grange dam, and is being constructed for the Modesto and Turlock Irrigation Districts. Its location is in the canyon of the Tuolumne River, three miles from the town of La Grange. Work on the project was commenced in June, 1891, and has been prosecuted continuously ever since. A force of 200 men has been employed on the work, the total cost of which will be \$600,000.

The annals of engineering have hitherto recorded as the highest the Vyrnwy dam, which retains the water supply for the city of Liverpool, England. Its height, from base to summit, is 127 feet, but the La Grange will be two feet higher. Other celebrated dams, such as the Bear Valley, in San Bernardino County, and the Sweetwater, near San Diego, are properly known as reservoirs, and the protection of their basins as retaining walls.

The La Grange is being built by R. W. Gorrill, and will be 360 feet long on top, the plan being curved on a radius of 320 feet. Its maximum height above the foundation will be 127 feet 9 inches. The front face of the wall is made to conform to the curve described by the water in overflowing, and to deflect it into the basin in front of the dam.

The dam is built of "cyclopean rubble," and is a model of solidity. Huge rocks, weighing from six to ten tons, were first laid on the bottom. All their projecting pieces were cut off, and a flat but rough surface was prepared for the lower bed. Before being placed in the bottom, all stones, whatever their size, were scrubbed, and subjected to the action of numerous jets of water under pressure of seventy-five feet.

The process of construction was as follows:

"A level bed was first prepared in the rock and covered with a two-inch layer of cement mortar, which was beaten to free it of air. A large stone was then lowered into position by a steam crane, and was beaten down into the mortar by blows from heavy handmauls. Other large stones were similarly placed, but so as not to touch each other. The spaces left between them were filled with concrete, which was thrust into the narrow spaces with tampers.

"The work within the reach of each crane was brought up from six to eight feet before the crane was moved. In each course the immense stones were laid so as to bind with those in the course below. No horizontal joints passed through the wall, as the top of each course was left with projecting stones and hollows, which permit it to be well bound with the next course. To make the back face thoroughly water-tight, the vertical joints were filled with mortar alone, and into this broken stone was forced."

The La Grange dam will distribute water over a territory embracing 276,000 acres. The Turlock district comprises about 198,000, and the Modesto district 78,000 acres. The water will flow over the dam into two ditches. One will be 30 miles long and 100 feet wide, the other 28 miles long and 80 feet wide. The waters of the Tuolumne River will be banked up by the dam in the rocky canyon. A lake will thus be formed four miles long and a half mile wide. An idea of the solidity of the dam may be gathered from the fact that at its base it is 117 feet 9 inches thick, and that of solid stone, forming an indestructible barrier to the lake of water behind.—*Pacific Lumberman*.


Rapid Building.

Chicago has made a new record for rapid building operations by the manner in which work has been pushed on the New York Life Insurance Company's building, now in course of erection at La Salle and Monroe Streets. This building is of the so-called Chicago construction. On July 19 excavation was commenced, and as there had been no cellar under the structure which had previously occupied the site and been torn down, the work was from the surface. In nine days the curb wall was completed. On August 17 the entire foundation had been laid, and on the day following the first iron column was set in the basement. Thirty-six working days thereafter—September 28—a flag waved from the top, announcing the entire completion of the iron framework, and five of the days had been lost in waiting for delayed iron. On October 5, besides the skeleton framework, two stories of granite and three of terra cotta exterior walls had been laid, four floor arches of fireproofing had been set in place, the entire system of steam mains throughout the building set, and the basement floor laid in concrete. Ten days were consumed waiting for cut stone. Thus in ten weeks and one day—sixty-one working days—the entire framework for a building twelve stories in height and covering an area of 80 by 140 feet had been set, and a week later five stories of outer wall, composed of granite and terra cotta, had been laid. For four weeks double relays of men were employed, sixteen hours being counted a day; for the remainder of the time eight hours constituted a day's work. Taking this into account, the work occupied ninety-five working days from the day on which the

first dirt was removed from the site. It is expected to have the structure ready for occupancy by February 1, 1894.

A SIMPLE GAS METER CONNECTION.

To save time in setting meters, and afford an efficient and inexpensive connection with the street service pipe and also with the distributing gas pipes in a house, is the design of this improvement, which has been patented by Mr. Albert H. Gindele, of No. 228 Second Street, Jersey City, N. J. On the end of the lead pipe to be connected to a meter is placed an exteriorly threaded sleeve, and the end of the pipe is then upset to form a flange against which the sleeve abuts. A cylindrical junction nut, preferably of brass, screws upon the threaded sleeve, and has a hub-like extension which bears against the flange and also screws upon a thimble screwing into the bore of the lead pipe, the

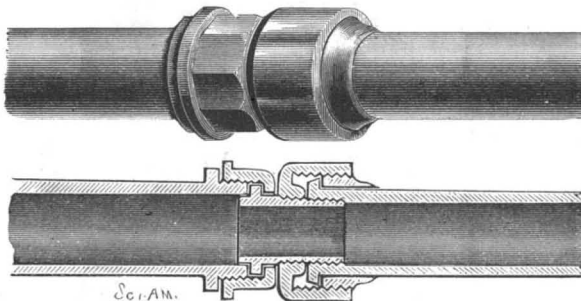
**GINDELE'S GAS METER CONNECTION.**

thread of the thimble producing a mating thread in the soft metal of the pipe. The thimble also has an external flange which is engaged by and has gas-tight contact with an inwardly radial flange on a union nut of the usual form, the nut screwing upon the end portion of the hollow meter post. The improvement is designed to afford a simple and reliable connection and dispense with solder joints.

SECURING PROPELLER BLADES TO THE HUB.

The illustration represents an improved means of securing propeller blades to the hub, recently patented by Mr. Martin Davies, Jersey City, N. J.

According to this improvement, screw bolts are inserted through the hub from the inner side, and then through the bases of the propeller blades, when nuts are applied to their projecting outer ends. Fig. 1 is a view in perspective; Fig. 2 a horizontal section at one side of the hub; and Fig. 3 is a section through the hub and opposing blades, the heads of the bolts being countersunk in the interior of the radially bored hub and arranged to form part of a smooth hub bearing for the propeller shaft. The hub has four faces, each adapted to receive a propeller blade, and having a circular recess in one wall of which is a feather, the base of each blade having a boss entering the recess, and

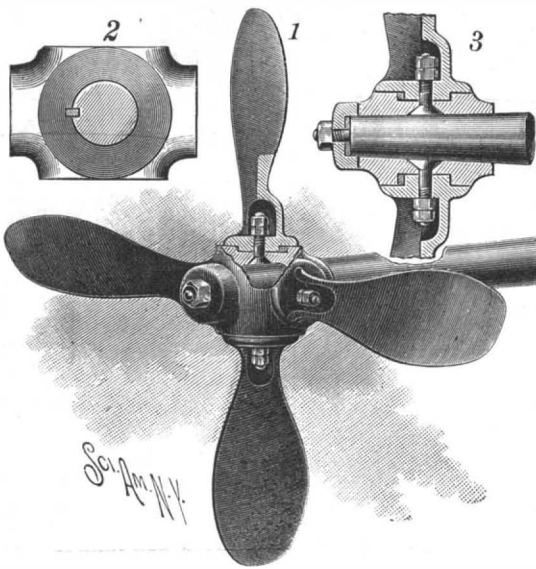**DAVIES' PROPELLER.**

the boss having a recess to receive the feather. In securing the blade to the hub, the nut is turned down with great force, whereby the blade is securely clamped and fastened in place, but so that it may be removed with convenience and dispatch. This invention has been practically tested in actual use, and its value has thus been demonstrated.

THERE is a bill pending in Congress providing for the issuing of postal fractional currency, in denominations of 5, 10, 25 and 50 cents. This is intended to furnish the public with a convenient form of money for transmission through the mails. It is to displace the postal notes, which are to be withdrawn from sale on January 1, 1894. This fractional postal currency would be furnished at its face value and without the formality now necessary to get a postal note. There are branches of business involving small transactions which would be sensibly aided by such a currency for inclosure in letters.—*Philadelphia Ledger*.

A Steam Carriage for Road Use.

C. L. Simonds, of Lynn, Mass., has made a steam carriage for his own use that will make ten miles an hour. The carriage weighs only 400 pounds and can carry two persons at a time. It has the appearance of an ordinary carriage in front, except there are no provisions made for a horse. The wheels are of cycle make and are four in number. The hind wheels are 43 inches and the front wheels are 36 inches, with rubber tires. The boiler and engine set just in the rear of the seat and give the carriage the appearance of a fire engine. The steam generates in what is called a porcupine boiler, which weighs 100 pounds. The steam is made by naphtha flames from three jets. The naphtha is kept in a cylinder, enough to last for seven hours, and there is a water tank that will hold 10 gallons. There is a pump that is automatic in action directly connected with the engine. The steering part consists of a crank wheel on the footboard, so that the engineer can steer and attend to the engine at the same time. The body of the carriage rests on a cradle and three springs. It is easy riding, and allowance has been made for every movement. The shafts are of steel, and can stand all of 1,000 pounds. Mr. Simonds has given the steam carriage a trial already, and it has proved a success. It started off at a ten-mile gait; there was no noise, smoke or trouble whatever.—*Springfield Republican*.

Photographic Notes.

Photographing upon Fabrics.—Mr. August Villain, a dyer of Aubervilliers, recently communicated to the Societe d'Encouragement the processes that he employs for obtaining photographic prints upon fabrics. He recalled the researches of Messrs. Kopp, Willis, Green, Cross, and Bewan, and the application made by these chemists of alkaline bichromates, chromates of copper and aniline, solution of aniline in benzine, and denitrated primuline. In order to obtain the negatives, the process that has given Mr. Villain the best results consists in sensitizing the fabric with the following mixture:

Water.....	1,000 parts.
Bichromate of potash.....	35 "
" " ammonia.....	15 "
Metavanadate of ammonia.....	5 "

The fabrics impregnated with this solution are dried in the dark at a low temperature, and exposed to the light under a negative. They are afterward thoroughly washed. In this state they have fixed enough mordant to dye the print in baths prepared with the most varied artificial colors.—*Annales Industrielles*.

Photographing upon Marble.—In order to photograph upon marble there is applied to an unpolished slab of the latter a solution composed of:

Benzine.....	500 parts.
Spirits of turpentine.....	500 "
Asphalt.....	50 "
Yellow wax.....	5 "

After the solution is dry an exposure to the sun is made under a negative. The developing is effected with turpentine or benzine. The slab is then thoroughly washed, and those parts of it that are to remain white are covered with an alcoholic solution of gum lac. The slab is then immersed in a tincture of a coloring substance soluble in water.

After a short time the coloring material will have penetrated the pores of the stone, which is then removed from the bath and polished. The effects thus obtained are, it is said, very beautiful.—*Annales Industrielles*.

The Snow Sheds of the Union Pacific.

A correspondent of the N. Y. *Observer* says: "With two and sometimes three engines, our heavy train, now divided into two sections, climbed up the giant wall of the Sierra Nevada. We passed through the magnificent scenery of Shady Run, Blue Canyon and Giant and Emigrant Gaps. In running one hundred and seven miles we had climbed nearly seven thousand feet, sometimes over very steep grades. Before we reached the summit, snow sheds began to appear, and soon became practically continuous. It was the month of May, and the mountains were still covered deep with snow. We rode through forty miles of these wooden tunnels, from whose windows we could now and then catch glimpses of wild wastes of snow-covered mountains, and at other times of forests of pine and fir trees. Without these sheds it would be impossible to operate the road in winter. They are built in the most thorough manner, often upon solid foundations of masonry, and are separated by iron plates into sections, to guard against the spread of fire. There are automatic electric fire alarms in one of the longest sheds, and an engine with a tank close at hand is kept ready to flood any section that should catch on fire. The sheds are patrolled and guarded in a careful manner. Such attention is due not only to the passenger and freight traffic which the road conducts, but to the value of the sheds, which average from eight to twelve thousand dollars per mile. Several miles, where bridges and precipices made the construction difficult, cost as much as thirty thousand dollars per mile."

THE TRIPLE-SCREW WAR SHIP COLUMBIA.

The official speed trial of this our most recently built war vessel took place November 18, a previously attempted trial on November 16 having been given up on account of bad weather, although the engines were said to have worked smoothly, developing more than the power called for by the contract. The course was almost directly north from a point off Cape Ann, Mass., a distance of 43.96 nautical miles, the vessel crossing the line at full speed, making a long turn, and taking another run over the course in the opposite direction. According to the arrangements made, the times of passage over the course alone were to be taken, the time of turning being eliminated, but during the turn no change in engines or boilers was to be permitted, and not a valve or link was to be touched.

The starting line was crossed at 9:54:40, and at 11:49:48 the ship dashed across the finish line, completing the first half of the trial, the average speed having been 22.92 knots. During this run the steam pressure had risen to 158 pounds, and revolutions 136 each on the twin screws and 131 on the midship screw, and the last seven miles were said to have been made at the rate of 25.3 knots an hour. After turning in a circle of about four miles diameter, the run back was commenced, the line being crossed at

tation and correction of the resulting speed, there were yet a host of subjects concerning which the government officers were deputed to gather numerous and thorough data. Indicator diagrams were taken at close intervals from every engine on board, and from these will be determined pressures, horse power, and other information of great value to the navy department, not only for use in relation to the Columbia herself, but as a guide and assistance in future engine designing. Temperatures of fire rooms, fuel, water, etc., were also carefully noted.


The Columbia is 412 feet long on the load water line, 58 feet extreme beam, 22 feet 6½ inches normal draught, and displaces 7,350 tons. Her power consists of three three-cylinder vertical inverted triple expansion engines, having about 22,000 collective indicated horse power and driving three screws, one on the middle line, as in single screw ships, and the other two under the counters, as in twin screw vessels. This power is calculated to produce a speed of 21 knots an hour, which the contract for the vessel calls for, but the builders will receive a bonus of \$50,000 for every quarter knot the vessel makes over the required twenty-one knots. Our engraving is from *Once a Week*.

The engines are in three separate water-tight compartments, the two driving the counter screws be-

engines would not do, because of their size and the fact that they would be very extravagant in the use of steam at the ordinary cruising speed. Besides this the space that could be given up to machinery was restricted, and would not be satisfactory for twin screw engines. Mr. Melville then decided that triple screw engines were the only ones that would do, and at once set about the preliminary design. Through the course of her construction he has watched the machinery carefully, and the success which she has achieved marks a new era in marine propulsion.

Potassium Permanganate as an Antidote.

Schlagdenhauffen and Reeb refer to the fact that J. Antal has found permanganate of potassium act as an antidote to phosphorus, muscarine, strychnine, colchicine, oil of savin, and oxalic acid, when administered to frogs, rabbits, and dogs, with or directly after the poisons, and then proceed to describe the result of experiments conducted by themselves to ascertain the effect of the permanganate upon coronillin, $C_{11}H_{12}O_6$, a poisonous bitter principle isolated by them some years ago from the leaves of *Coronilla scorpioides*. They find that when the salt is placed in direct contact with the glucoside the latter is decomposed, being entirely oxidized, and physiological tests, in which frogs,

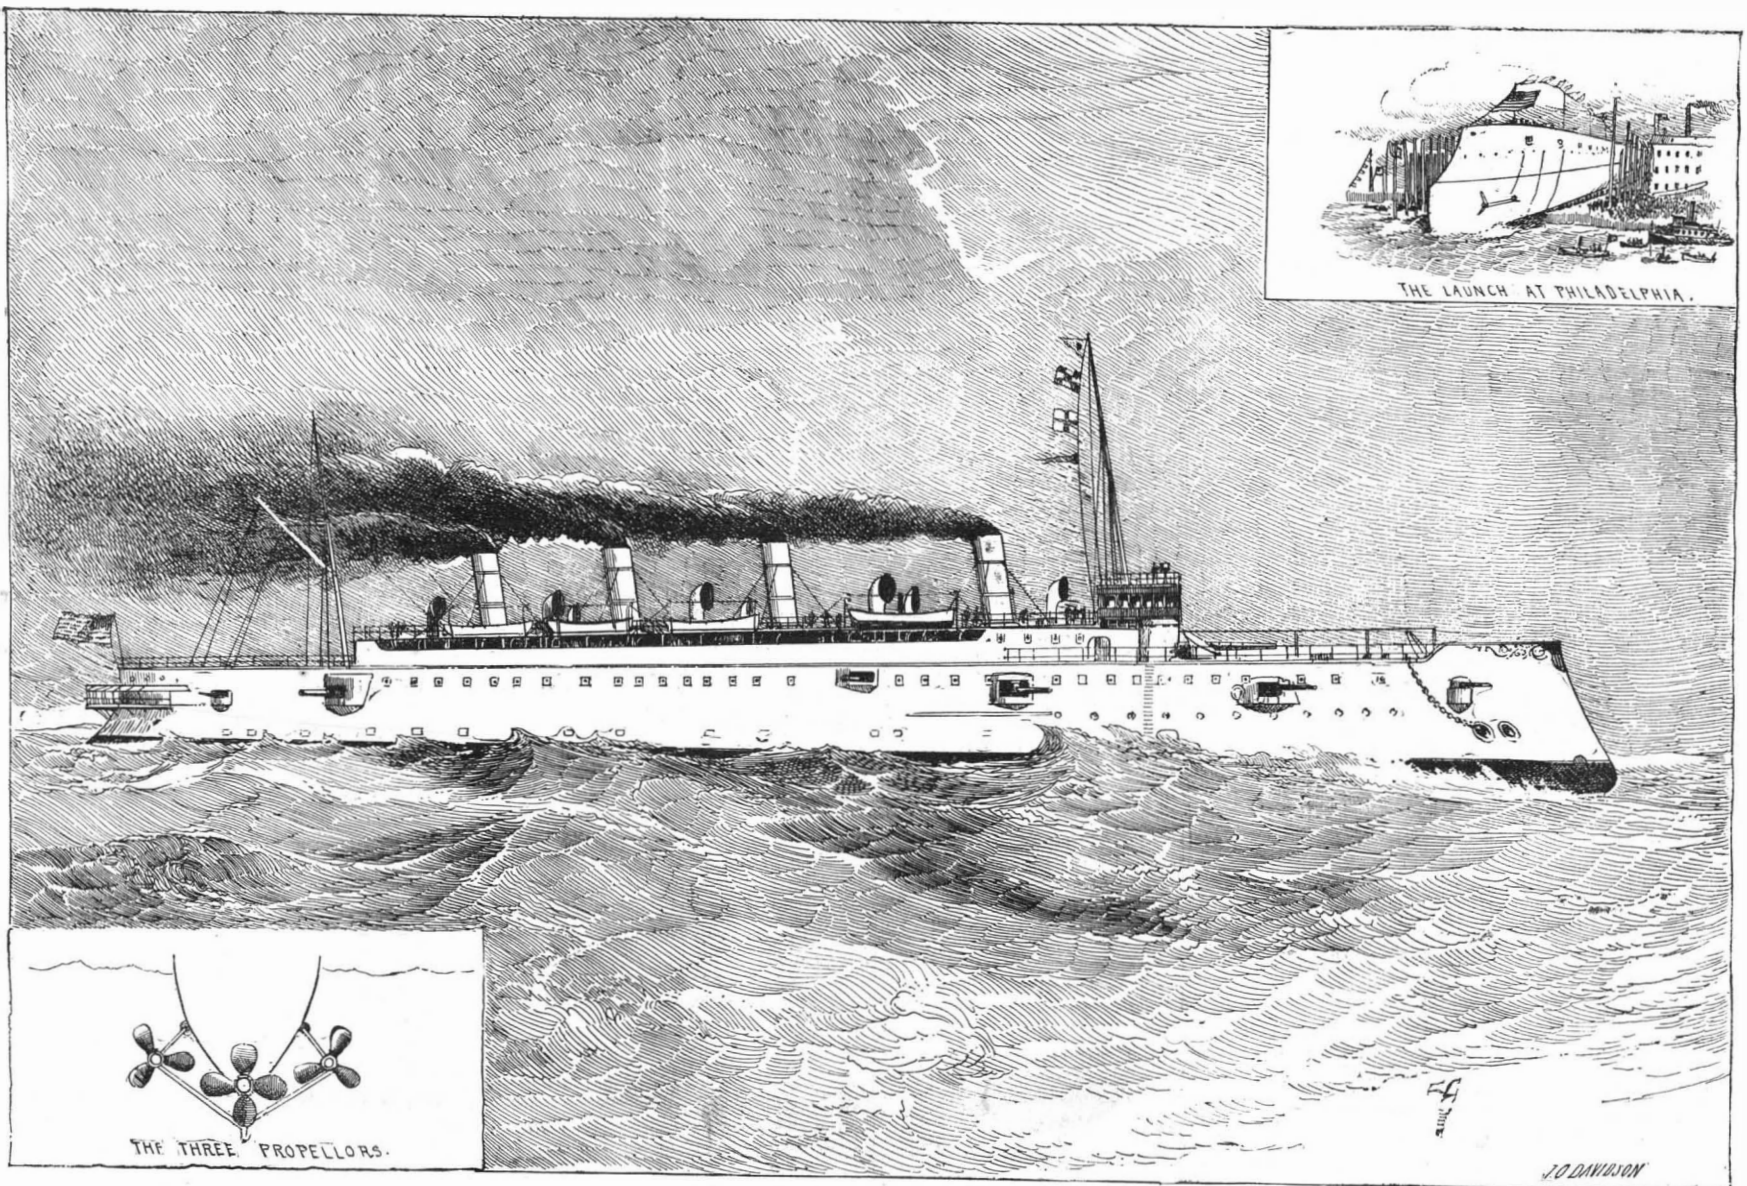

THE NEW UNITED STATES WAR SHIP COLUMBIA.

12:14:58, with a steam pressure of 160 pounds, the twin screws making 136 revolutions each, and the midship screw 130.

During the backward run there was some priming of the boilers at one time, and the speed between two of the stations on the course dropped to the rate of 21.11 knots, but the total backward run was made at the average rate of 22.71 knots. The mean of the two runs was therefore figured as 22.81, and the builders have earned a premium of \$350,000 for attaining a speed of seven quarter knots over that called for by their contract. The naval officers aboard are said to have expressed the highest satisfaction with the performance of the vessel throughout.

The board conducting the trial consisted of Rear Admiral George E. Belknap, Commodore J. G. Walker, Capt. Edmund W. Matthews, Chief Engineer Edward Farmer, Commodore Philip H. Cooper, Commander F. A. Cook, Lieut. Commander Joseph N. Hemphill, and Naval Constructor Joseph Feaster, with Lieut. L. L. Reamy as recorder. These officers had also numerous assistants, the total government inspection force numbering no less than 36 officers—13 of the line, 20 of the engineer corps, and 3 of the construction corps of the navy. While the determination of the speed alone required nothing save the accurate marking of time at the passage of certain ranges, and the careful compu-

ing placed abreast the same as in twin screw ships, and the one driving the center shaft just abaft them and lapping each for one-half its width. Steam is supplied by eight four-furnace double-ended boilers. The weight of all propelling machinery, including water in the boilers, is 1,950 tons. The coal supply on her normal displacement is 1,200 tons, but her maximum bunker capacity is 2,200 tons, which will give her at the most economical cruising speed a radius of action of about 16,000 knots.

The application of power through triple screws in large ships is an innovation, and its results in the Columbia are watched with intense interest by the entire civilized world. Essentially and avowedly a commerce destroyer, and not a fighting ship, the armament of the Columbia will be comparatively light.

The Columbia has been in a special degree the work of Engineer-in-Chief G. W. Melville, U. S. N., of the Bureau of Steam Engineering, under whose direction the designing of her machinery was done. When the estimates were made for this ship, the speed fixed was twenty knots, but after the naval appropriation bill was passed, it was found that in conference the speed had been raised to twenty-one knots, and Mr. Melville decided that the ship should have from 20,000 to 21,000 horse power, and at once began to lay out the engines and boilers. It soon became apparent that twin screw

pigeons, and guinea pigs were used, seemed to prove that the permanganate is a true antidote to the poison when administered within a sufficiently brief time after the latter.—*Journ. der Pharm. von Elsass-Loth.*

Seeing the World's Fair at Home.

Many as were the visitors to the great Columbian Exposition just closed, they included, in fact, but a small percentage of those who would like to have gone but were unable to do so. To the most of the stay-at-homes, however, there will now be offered, for many months to come, opportunities of acquiring a very near and pleasurable acquaintance with the best features of the memorable show, through the means of the excellent magic lantern and stereopticon views taken. T. H. McAllister, of New York, who received an award on his exhibit of magic lanterns and stereopticons, and who has long made a specialty of lantern slide views, has a wonderfully complete and varied collection of such views of the Exposition itself, by means of which one can obtain a most vivid portrayal, not only of the buildings, but a large proportion of the exhibits. One set of these lantern slide views is also accompanied by an original descriptive lecture thereon, in pamphlet form, whereby entertainment and instruction may be given to an audience by one who never visited the Fair.

RECENTLY PATENTED INVENTIONS.

Engineering.

FURNACE.—Wardell Guthrie, Chicago, Ill. Air pipes arranged alongside the furnace, according to this improvement, have openings into the furnace above the fire surface, and the furnace is fed by a screw conveyor in a trough lengthwise and centrally of the bottom, the fuel being fed back and upward as a projecting crank on the end of the screw is turned. The air is fed by force directly on the surface of the fire, as the fuel is fed up from the bottom. A dump or grate, for removing cinders or ashes, is placed at one or both sides of the feed screw.

DRAG FOR STEERING VESSELS.—Louis Boucher, West Superior, Wis. This is a device designed for use only when a ship's rudder becomes disabled, and it is so made that it may be conveniently stowed away and set up in a very short time when needed. The drag is an air-tight cylinder with pointed forward end, in which is a ring, there being annular flanges or fins on the cylinder. Attached to the ring is a chain which connects with two chains, one leading to each side of the vessel near the stern, where the chains are passed around pulleys in the outer ends of projecting beams, and thence over pulley blocks and a central capstan, whereby the drag may be easily moved to one side or the other in the rear of the vessel.

PROPELLER.—Frank J. Leisen, Woodbridge, N. J. This propeller has cylindrical, spirally formed and diagonally opposing exterior surfaces, and hollow interior formed with two pockets, one pocket visible from each side, and both pockets uniting to form a circular opening at the outer end. There are spiral exterior blades or ribs, each rib above a pocket. This improvement has been practically tested in a 16 inch propeller, demonstrating its superiority to an 18 inch fluke wheel, and a 36 inch pattern has been furnished the owners of Yankee Doodle, of Philadelphia, from which a propeller is to be made and given a public trial on that famous yacht.

Railway Appliances.

CAR COUPLING.—Edward N. and Jacob J. Byers, Cameron, Mo. This invention provides a safety attachment for couplers of the Janney type, whereby, should the drawbar be drawn from its proper seat, the device acts automatically to uncouple the loosened drawhead from the opposing car. An uncoupling lever connected with the drawbar has one end located beneath the coupling pin, and a guide is so connected with a fixed support that the lever will be elevated beneath the pin as the drawbar or drawhead is carried outward from the proper position.

PNEUMATIC SIGNAL.—George V. Steeb, Brooklyn, N. Y. The utilizing of air pressure to operate signals or semaphores is the object of this improvement, which provides for bringing the air pressure into action by the passing of a train over the track. The air under pressure is supplied by a pipe from any suitably located compressing source to a cylinder located in a suitable chamber beneath or adjacent to the track, this cylinder being connected with another cylinder in which is a piston, the movement of which operates the semaphore rod, the action being controlled by a valve in a third cylinder, actuated as the wheels of the car pass over inclined planes at the side of the track. The apparatus may also be used to ring alarm bells, move crossing gates, etc.

Electrical.

CARBON HOLDER.—Clark C. Hill, Newport, R. I. This holder is formed of a cylindrical, longitudinally slotted socket with thickened ends, and having near one end a circumferential groove to which is fitted a circular spring. With this improvement the upper and lower carbons of electric lamps may be held in the position of use without the employment of screw clamps or adjusting screws. The sections of the socket formed by slotting may also be made to clamp the carbons sufficiently without employing the circular spring.

ELECTRIC REGULATOR AND SWITCH.—Walter N. Jones, Jr., Petersburg, Va. This is an improvement for use on electric cars, in which the same adjusting devices serve to regulate the current to both the motor and the brake magnets, without allowing the current to be on the motor and the brake magnet at the same time from any inattention or forgetfulness of the motor man. Combined with two concentric rheostats, and two concentric series of segmental plates leading thereto, is a central shaft with insulated metal tubes bearing separate contact arms playing respectively upon the series of plates, the central shaft and metal tube forming two independent paths for the current centrally through the rheostats. The power increases in the motor by the movement of the crank in one direction, and increases in the brake by the mere reversal of the movement of the crank.

Mechanical.

HOOP SAWING AND SHAPING MACHINE.—Ephraim O. Hall, Marshfield, Oregon. This machine is designed to cut two hoops from a round log each time the log is fed to the machine, the hoops being perfectly formed, their upper sides planed, the edges scarfed, and the under side, in the direction of the heart of the log, left rough, the machine requiring but a single attendant. A diagonal saw at the rear of a vertical saw produces a kerf meeting that formed by the vertical saw, a planer being operated in conjunction with the latter saw, while an adjustable planer and an adjustable saw are also diagonally located, the latter saw being held to cut beneath the surface planed smooth by the planer.

HOOP CUTTING MACHINE.—Alban H. Adams, Fort Meade, Fla. According to this invention a roller cutter is applied to an ordinary rotary veneer cutting machine, to score the log or make longitudinal incisions in it, making also perforations between the incisions, so that when the veneer is turned from the log it will fall apart at the places of the incisions, forming a series of hoops, the grain of which runs lengthwise, and which are already perforated to receive the nails. The hoops thus made are especially adapted for use on orange boxes and similar packages.

PRINTER'S FURNITURE.—Jacob C. Wolfe, New York City. The design in this furniture is to present the maximum of bearing surface with the least weight, while it may be quickly and conveniently cast, and will afford a facing of uniform thickness. It consists of a hollow block with top and bottom recessed to form a marginal rib, the bottoms of the recesses inclining from the side ribs to the center of the block, while it has also a longitudinal central wall and transverse partitions forming pockets in each side.

WIRE BENDING MACHINE.—Cyrus M. Suter, Ashton, Ill. This is a machine for making stays especially adapted for placing the strands of wire fences and holding them the desired distance apart. The construction of the machine is such that the operation of forming a stay is entirely automatic, the stays being made successively from a length or coil of wire.

Agricultural.

CULTIVATOR.—August Leineweber, De Witt, Neb. This invention provides an improvement in cultivators of the disk type, and the cultivator shank is carried by and has vertical adjustment in a slide having movement upon the beam, there being a gear connection between the slide and the shank whereby the latter is revolved. Any desired number of cultivators may be placed upon a beam, and the cultivator disks are of peculiar construction, each disk being more or less cupped or rendered concave upon its inner face and convex upon its outer face.

Miscellaneous.

APPARATUS FOR LIGHTING BUILDINGS.—John W. Davis, New York City. The lighting of interior rooms, basements and lofts, not readily lighted by windows, is the design of this improvement, the apparatus first condensing the beams of light, then carrying them to the desired locality and diffusing them, by a peculiar arrangement of mirrors operated by clockwork. A concave paraboloidal mirror is supported and adapted to travel above a light conduit, a convex paraboloidal mirror being held at the focus of the concave mirror and adapted to throw beams of light through an aperture in the latter, a plane deflecting mirror being held to receive the beams of light and throw them into the conduit.

VEHICLE BRAKE.—Eugene W. Cleveland, Routhwaite, Canada. This is a strong and simple device, more especially designed for use on portable engines and other heavy vehicles. It comprises a frame on which is a windlass, chains attached to and wound upon the windlass being extended in opposite directions and hooked upon spokes of the wheels of the vehicles.

GLASS STRUCTURE.—Edgar W. Cunningham, Jersey City, N. J. This improvement pertains to an improved construction of skylights and the roofs and sides of greenhouses or conservatories, combining with aligned panels a joining piece of two metal binding strips having straight abutting sides which are soldered together, and parallel flat upper and lower flanges which closely embrace the adjacent opposite ends of the panels, the lower flanges being extended and curved to form a gutter.

SPIRIT LEVEL AND INCLINOMETER.—James P. Famous, Norristown, Pa. This device comprises an adjustable level tube in an elongated level stock, there being a grade indicating slide block at each end and a fixed transverse level tube on the top of the stock, in combination with a swiveling sight tube on the stock. The implement is adapted to determine whether objects are level, plumb, or inclined, and exactly determine the degree of inclination from a horizontal plane, the device being adapted for use in building and engineering work of all kinds.

ROCK DRILL.—William O. Higgins, Kingwood, Ind. This is an implement which may be conveniently worked by hand and easily handled by one man to place it in the desired position. In a suitable upright frame are mounted a vertically movable drill shaft and a driving shaft, an eccentric on the latter operated by a pivoted lever, there being a sliding ratchet wheel on the drill shaft and a pawl pivoted to a centrally pivoted lever, and a link connecting the two levers. The drill is steadily fed downward, to be able at every stroke to deliver an effective blow.

WRITING TABLET AND MANUSCRIPT HOLDER.—Barton W. Scott, San Jose, Cal. This improvement is more especially designed for the use of stenographers, public speakers, type setters, and others, to permit of readily writing matter on a continuous sheet, and conveniently displaying the written matter. The invention comprises a casing having two winding drums for the paper, a main shaft being journaled in the casing and actuating two gear wheels, which are adapted to be geared with the winding drum.

COAL SCREEN.—Frank L. Sackett, Fredonia, N. Y. To facilitate the screening of broken coal for retail purposes is the object of this invention, and the device provided therefor is simple and inexpensive. It consists of an oblong frame, across which the screen proper is stretched, and having an end wall and discharge opening, and whose bottom slides on side bars of the screen, the hopper being adjustable and removable. The device may be attached to the side of a cart or inclined against an upright support.

BICYCLE WHISTLE.—John F. Hylan and Robert L. Sinley, Brooklyn, N. Y. This is a simple and practical device, which may be readily attached to a safety bicycle, and comprises an air pump, to be actuated by the rotary motion of the front wheel, to afford a copious supply of air, and on the movement of a lever, blow a loud blast on a whistle connected to the pump. The lever is projected below the handle bar, and the blast may be prolonged for as long a time as the lever is held gripped with the handle bar.

THILL SUPPORT.—Adolph Meyerhoff, New York City. A pair of keepers on the thill or pole is provided for by this improvement, and a slide bolt in the forward keeper has a head engaging the keeper, while a chain secured to the rear end of the bolt runs through the rear keeper, and a hook on the running gear engages the chain. The device is very simple and inexpensive, and may be attached to the thills or pole of any

vehicle to hold them at the necessary height for convenience in storing, or to hold them up to take their weight from the horse's back.

FOLDING BED.—Hugh Stevenson, New York City. This is an improvement upon a formerly patented invention, according to which, when the beds are folded, the bedding is suspended, both the covers and mattress, to permit a free circulation of air between the covers, that they may be thoroughly ventilated. The present patent provides an improved construction, whereby, when the bed is folded, the covers may be separated and held perfectly straight. The covers and mattress being also so held that the bed may be very easily made up when necessary.

SHOE.—William T. Loyd, Hiawatha, Kan. The sole of this shoe is formed of a single sheet of metal, with a metallic counter, and a flange around the toe and ball, a flexible top toe piece being fastened to the front flange and a flexible lining at the heel. Beneath the ball and heel are also attached plates having serrated flanges, adapting the shoe especially for use as an ice creeper. The shoe is held on the foot by a strap over the instep.

BOX FASTENER.—Thomas Cole, St. Mary's, Mo. A safe and simple fastener, which will permit crates on which it is used to be packed on top of each other and slid about without disturbing the fastening, has been provided by this inventor. The fastening hasps are secured to staples made with spring coils, and the free ends of the hasps engage pins in recesses of the upper face of the lid, the spring tension holding the fastening firm, while the pressing up of the staple loosens the hold of the hasp on the pin.

Design.

SWEATERS.—William T. Pitchers, Godalming, England. Five design patents have been awarded this inventor on this article of apparel. In the first the sleeves and body are ornamented with panels having adjacent angular figures alternately embossed and in intaglio, and in the second are decorative panels of diamond shape, with sunken body and embossed margin. In the third are intersecting figures of serpentine character, with interposed series of ribs; in the fourth, rectangular figures inclose grouped circular figures, and in the fifth the body and sleeves have a surface finish of embossed ribs arranged spirally or diagonally.

NOTE.—Copies of any of the above patents will be furnished by Munn & Co., for 25 cents each. Please send name of the patentee, title of invention, and date of this paper.

SCIENTIFIC AMERICAN
BUILDING EDITION.

NOVEMBER, 1893.—(No. 97.)

TABLE OF CONTENTS.

1. Elegant plate in color showing a residence at Bridgeport, Conn., recently erected for Mr. Thos. C. Woodin, at a cost of \$4,600 complete. Floor plans and two perspective elevations. An excellent design. Mr. Henry A. Lambert, architect, Bridgeport, Conn.
2. Plate in colors showing the residence of Clarence M. Burch, Esq., at Philadelphia, Pa. Two perspective views and floor plans. A very attractive design. Messrs. Moses & King, architects, Philadelphia.
3. A dwelling erected at Joliet, Ill. Perspective views and floor plans. An excellent design. Cost \$6,000 complete. Mr. J. C. Weece, architect, Joliet, Ill.
4. A suburban cottage erected at Glenbrook, Conn., at a cost of \$3,500 complete. Floor plans, perspective view, etc. Mr. E. H. Waterbury, Stamford, Conn., architect. An excellent design.
5. Engravings and floor plans of a suburban residence erected for Mr. George H. Barton, at Hartford, Conn. Messrs. Hapgood & Hapgood, architects, Hartford, Conn. A very attractive design.
6. Very excellent design for a two-family house, erected at Bridgeport, Conn., at a cost of \$4,500. Floor plans and perspective elevation. Mr. A. H. Beers, architect, Bridgeport, Conn.
7. St. Peter's Chapel at Springfield, Mass. Perspective and ground plan. Cost \$7,100 complete. Mr. W. P. Wentworth, architect, Boston, Mass.
8. Engraving showing some city dwellings of modern design at Washington Heights, New York City. Plans and perspective views. Mr. W. E. Mowbray, architect, New York.
9. Residence of Mr. C. T. Hemstead at Glenbrook, Conn. Plans and perspective. An excellent design.
10. Moving of the Normandy apartment building at Chicago. Supposed to be the largest building ever moved and turned around on rollers. Numerous illustrations.
11. The World's Columbian Exposition. A general view.
12. Sketches at the World's Columbian Exposition.
13. Miscellaneous Contents: Causes of fire in dwellings.—An improved brace, illustrated.—Steel ceilings, illustrated.—A large day's sawing.—The new mode of constructing foundations.—Sheathing quilt, illustrated.—A cap for the obelisk.—Interior woodwork for buildings, illustrated.—Electrical injuries to gas and water pipes.—An improved scraper, illustrated.—Linseed oil for paint and polish.—Improved circular sawing machine, illustrated.

The Scientific American Architects and Builders Edition is issued monthly. \$2.50 a year. Single copies, 25 cents. Forty large quarto pages, equal to about two hundred ordinary book pages; forming, practically, a large and splendid MAGAZINE OF ARCHITECTURE, richly adorned with elegant plates in colors and with fine engravings, illustrating the most interesting examples of Modern Architectural Construction and allied subjects.

The Fullness, Richness, Cheapness, and Convenience of this work have won for it the LARGEST CIRCULATION of any Architectural Publication in the world. Sold by all newsmen. MUNN & CO., PUBLISHERS, 361 Broadway, New York.

Business and Personal.

The charge for insertion under this head is One Dollar a line for each insertion; about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appear in the following week's issue.

- For mining engines. J. S. Mundy, Newark, N. J.
- "U. S." metal polish. Indianapolis Samples free.
- Improved iron planers. W. A. Wilson, Rochester, N. Y.
- The new material, "linenoid." Westfield, Mass. Catalogue free.
- Microbe Killer Water Filter, McConnell Filter Co., Buffalo, N. Y.
- Patent for Sale—Big savings. Cable grip. Address No. 2123 Eastern Ave., Baltimore, Md.
- Steam Hammers, Improved Hydraulic Jacks, and Tube Expanders. R. Dudgeon, 24 Columbia St., New York.
- Will purchase patent of meritorious small article. Give particulars. Manufacturer, box 2238, New York.
- Estimates furnished for moving, raising, or shoring buildings. W. K. Clynes, Jersey City, N. J. Estab. 1853.
- Screw machines, milling machines, and drill presses. The Garvin Mach. Co., Laight and Canal Sts., New York.
- Centrifugal Pumps. Capacity, 100 to 40,000 gals. per minute. All sizes in stock. Irvin Van Wie, Syracuse, N. Y.
- Wanted to manufacture, new machinery of real merit. John M. Kramer & Bro. Machine Works, Maria Stein, O.
- Wanted—Novelty manufacturing companies to send their address to Fred. Beaumont, 1307 Franklin Street, Kansas City, Mo.
- Model dynamo motor. Ingenious machine for students and experimenters. Elbridge Electrical Mfg. Co., Elbridge, New York.
- Guild & Garrison, Brooklyn, N. Y., manufacture steam pumps, vacuum pumps, vacuum apparatus, air pumps, acid blowers, filter press pumps, etc.
- For the original Bogardus Universal Eccentric Mill, Foot and Power Presses, Drills, Shears, etc., address J. S. & G. F. Simpson, 2610 36 Rodney St., Brooklyn, N. Y.
- The best book for electricians and beginners in electricity is "Experimental Science," by Geo. M. Hopkins. By mail, \$4; Munn & Co., publishers, 361 Broadway, N. Y.
- Readers of the Scientific American can obtain, free of charge, a copy of the American Shipbuilder by addressing Bradley & Howell, 7 Coenties Slip, New York.
- Competent persons who desire agencies for a new popular book, of ready sale, with handsome profit, may apply to Munn & Co., Scientific American office, 361 Broadway, New York.
- Send for new and complete catalogue of Scientific and other Books for sale by Munn & Co., 361 Broadway, New York. Free on application.

Notes & Queries

HINTS TO CORRESPONDENTS.

Names and Address must accompany all letters, or no attention will be paid thereto. This is for our information and not for publication.

References to former articles or answers should give date of paper and page or number of question.

Inquiries not answered in reasonable time should be repeated; correspondents will bear in mind that some answers require not a little research, and though we endeavor to reply to all either by letter or in this department, each must take his turn.

Buyers wishing to purchase any article not advertised in our columns will be furnished with addresses of houses manufacturing or carrying the same.

Special Written Information on matters of personal rather than general interest cannot be expected without remuneration.

Scientific American Supplements referred to may be had at the office. Price 10 cents each.

Books referred to promptly supplied on receipt of price.

Minerals sent for examination should be distinctly marked or labeled.

(5502) H. E. W. asks how to run a 70 volt motor of $\frac{1}{2}$ horse power on a 110 volt circuit. A. Connect your motor across a pair of 12 light leads or larger, and place in series with it a resistance of 8 ohms. For the latter use No. 15 wire, or if you have them, 30 lamps in parallel with each other and in series with the motor.

(5503) J. R. N. says: Suppose a tank at an elevation of 250 feet in height, 10 feet in width, and 15 feet in height, with a pipe attached to bottom of tank 3 inches in diameter, 250 feet in length, perpendiculars. Suppose said tank to be filled with water. How many gallons of water will flow through said pipe per minute and what horse power would be required to keep this tank full of water, there being a constant discharge 3 inches in diameter? A. The pipe will discharge 1,275 gallons per minute and will require 80 horse power to keep the tank full.

(5504) E. A. S. says: Kindly inform me through the columns of your paper of a process for curing small skins, such as squirrel, etc. A. Mix bran and soft water sufficient to cover the skins. Immerse the latter and keep them covered for twenty-four hours, then remove, wash clean, and carefully scrape off all flesh. To 1 gallon of water (hot) add 1 pound of alum and $\frac{1}{4}$ pound of salt. When dissolved and cool enough to admit entrance of the hand, immerse the skins for twenty-four hours, dry in the shade and rub. Stir the liquor again, immerse the skins for twenty-four hours, dry and rub as before; immerse for twenty-four hours in oatmeal and warm water, partially dry in the shade, and finally rub until entirely dry. This leaves the skin like white leather, and fit for immediate use.

(5505) L. M. asks: What is the best method to preserve pneumatic tires for bicycles from one season to another, that is, to keep them from cracking and keep them soft? A. Wash the rubber tires perfectly clean and dry. Warm them by a stove and rub melted paraffine over the surface with a warm cloth. A very thin coat answers the purpose. If rubber cement can be obtained, such as sold by the rubber trade, a thin wipe of it with a woolen rag over the surface of the tires will keep them in good order.

(5506) S. B. W. asks: What the power of an ordinary man would be equal to in horse

Coin-controlled apparatus, R. M. Shaffer.....	508,848
Collar and hames, combined horse, J. Morrison.....	508,453
Coloring matter from dye-wood extracts, obtaining.....	508,592
Contact apparatus, E. Thomson.....	508,661
Cooking device, meat, A. Reubold.....	508,759
Cooking utensil, G. H. Nicholls.....	508,881
Copy holder, Bramlette & Evans.....	508,863
Cotton grader and nail arrester, T. D. Ruffin.....	508,842
Cotton scraper, R. Lum.....	508,431
Coupling. See Car coupling. Car and air brake coupling. Fire hose coupling. Hose coupling. Steam-tight coupling. Thill coupling.....	
Coupling, W. H. Hampson.....	508,705
Crane, J. Horton.....	508,476
Crayon or pencil, A. K. Cross.....	508,469
Cultivator, L. L. Lappen.....	508,712
Cultivator, L. L. Lappen.....	508,481
Cultivator, J. Macphail.....	508,433
Current motor, alternating, Kelly & Chesney.....	508,721
Current transformer, W. H. Hornberger.....	508,422
Currents, means for regulating multiphase, E. C. Aldrich.....	508,638
Cut-out, safety, E. Thomson.....	508,663
Cut-out, Jeffery, O. Offrell.....	508,629
Cutter. See Band cutter. Bolt cutter. Paper cutter. Twine cutter.....	
Cutting gauge and marker, combined, A. A. Walde.....	508,453
Cycle, flexible and collapsible mud guard for, M. F. Taintor.....	508,782
Cyclometer, C. H. Clawson.....	508,405
Cyclometer actuating device, C. H. Clawson.....	508,404
Damper governor, G. C. Hicks.....	508,707
Decorative films, roll for holding and applying, H. H. Hoe.....	508,869
Dental apparatus, rheostat for controlling electrically-operated, J. P. B. Fiske.....	508,692
Dental chair, T. N. Clark.....	508,564
Dental impression tray, H. A. Burlingame.....	508,677
Deodorizing hydrocarbon oils, A. Kayser.....	508,479
Detector. See Electric current meter detector. See also See Macdonald die.....	
Die, M. G. Fuller.....	508,694
Direct-actuating engine, J. G. Leyner.....	508,430
Dish drainer, bread board, and cutting board, combined, J. D. Johnston.....	508,885
Display table, W. Macnamar.....	508,627
Display tray, F. A. Gruebel.....	508,700
Draining apparatus, instrument, W. H. Pratt.....	508,556
Dolls, making, Scott & Seymour.....	508,635
Door bolt, D. D. Reeves.....	508,635
Door, flexible, F. Jeffs.....	508,720
Door opener, electric, H. T. Johnson.....	508,518
Draught equalizer, J. W. Steinmetz.....	508,778
Drawing apparatus for bars, E. Neely.....	508,740
Drawer, fastener, combined, W. P. Miller.....	508,678
Drawer pull, J. G. Hallas.....	508,678
Dredging machine, hydraulic, J. W. Sackett.....	508,706
Drier. See Clothes drier.....	
Dust separating machine, W. W. Green.....	508,611
Earth carrier, J. J. Wishard.....	508,589
Egg, cradling cases, apparatus for rotating, J. H. Bowley.....	508,806
Electric arc disrupter, W. B. Potter.....	508,632
Electric brake, E. B. Skinner.....	508,851
Electric circuit indicating apparatus, E. Thomson.....	508,672
Electric circuits, stand for controlling, E. R. Knowles.....	508,626
Electric circuits, switch box for controlling, E. R. Knowles & Park.....	508,625
Electric conductor, underground, J. C. Henry.....	508,613
Electric current meter detector, E. Thomson.....	508,660
Electric distribution, E. W. Rice, Jr.....	508,538
Electric distribution system, W. S. Moody.....	508,539
Electric distribution system, E. W. Rice, Jr.....	508,538
Electric elevator, A. T. Chase.....	508,680
Electric generator, W. S. Hill.....	508,580
Electric generators, regulating self-exciting alternate current, W. Stanley, Jr.....	508,493
Electric lighting system, E. Thomson.....	508,647
Electric lifting system, E. P. Willard.....	508,653
Electric machine or motor, dynamo, E. Thomson.....	508,658
Electric machines, brush holder for dynamo, E. R. Knowles.....	508,624
Electric machines, conductor for dynamo, Reist & Fiske.....	508,636
Electric machines, machine for boring out the standards and field magnets of dynamo, J. Riddell.....	508,639
Electric meter, E. Thomson.....	508,661
Electric motors, fluid pressure device for controlling, Parrshall & Darley, Jr.....	508,630
Electric transformer, E. Thomson.....	508,655
Electric transformer, E. F. Kelly.....	508,656
Electrical contact making device, W. F. Z. Desant.....	508,671
Electrical distribution system, E. Thomson.....	508,646
Electrical transformer, A. Ekstrom.....	508,688
Electrical transformer, E. Thomson.....	508,650
Electric. See Electric elevator. Hydraulic elevator.....	
Elevator controller, electric, J. P. B. Fiske.....	508,691
Elevator controlling mechanism, T. W. Eaton.....	508,510
Emery or corundum wheel, safety, W. S. Shippe.....	508,773
Engine. See Direct-actuating engine. Gas engine. Pumping engine. Rotary engine.....	
Engines, automatic safety stop for, A. J. Bates.....	508,671
Engines, igniting apparatus for gas, G. E. Hoyt.....	508,618
Engraving chuck, Eaton & Fargo.....	508,606
Eraser, blackboard, J. Hagerty.....	508,704
Etcher vapor, J. P. De Susini.....	508,447
Excavator, F. B. Schulte.....	508,637
Extension table, R. Mainardi.....	508,628
Extractor. See Butter extractor. Stump extractor.....	
Eyeglass guard, G. Bausch (r).....	11,389
Face plate jaw, J. N. Skinner.....	508,533
Fan motor, W. D. B. D. Dowse.....	508,710
Fender. See Car fender.....	
Fence, W. N. Lane.....	508,889
Fence and tightener, wire, C. H. Brunk.....	508,465
Fence machine, hand, J. H. Pivonka.....	508,536
Fillet, T. C. Belding.....	508,395
Fitter, J. A. Skinner.....	508,677
Fire pipe, E. A. Couch.....	508,634
Fire hose coupling, Sackett & Pfetsch.....	508,844
Fireproof construction, Crittenden & Biely.....	508,501
Fish net sinker, J. S. Coey.....	508,681
Floor-cloth, machine for the manufacture of, W. Farnham.....	508,463
Flour bin and sieve, G. C. Sherman.....	508,439
Folding gate, E. Pickett.....	508,750
Fringe balls to the border of textile fabrics, machine for attaching, R. A. Swoboda.....	508,645
Fruit washing and cleaning apparatus, D. E. Barlow.....	508,800
Furnace. See Boiler furnace. Ore roasting and calcining furnace.....	
Furniture, adjustable support for school, T. R. Roulstone.....	508,557
Fuse plug, H. C. West.....	508,665
Gauge. See Cutting gauge.....	
Game apparatus, C. Moore.....	508,524
Game apparatus, W. D. Pickets.....	508,834
Game apparatus, A. M. Quick.....	508,754
Garbage, night-soil, etc., apparatus for destroying, Engle & Thompson.....	508,511
Garden tool, combined, S. M. Alexander.....	508,393
Garment supporting bracket, J. J. Biely.....	508,437
Gas burner, natural H. H. Engelman.....	508,689
Gas engine, Von Oechelhauer & Junkers.....	508,633
Gate. See Car platform gate. Folding gate. Sliding gate.....	
Gate, G. H. Aylworth.....	508,799
Gate, Jester & Alexander.....	508,573
Gear driven, W. D. B. D. Dowse.....	508,701
Generator. See Electric generator.....	
Glass mould	

Horseshoe, W. C. Edge.....	508,607
Horseshoe calk sharpener, F. F. Gokey.....	508,908
Horseshoe toe calks, machine for making, T. B. Huestis.....	508,544
Hose coupling, G. Terlingen.....	508,448
Hose hanger, J. J. Smith.....	508,786
House, See Chicken house.....	
Hydraulic elevator, T. W. Eaton.....	508,470
Ice making plants, signaling and registering device for, A. J. McArthur.....	508,737
Ice, means for cutting, L. Daft.....	508,819
Incubator, E. W. Andrews.....	508,857
Incubator, E. J. Bray.....	508,806
Incubator, J. M. H. Spooner.....	508,492
Indicator, See Speed indicator.....	
Insulating composition, E. Thomson.....	508,653
Insulation of dynamo-electric machines, protection for the, E. Thomson.....	508,649
Ironing board or cylinder, for ironing machines, S. Barrett.....	508,595
Jack, See Pegging jack.....	
Jar or bottle receiver, R. G. Good.....	508,697
Kitchen utensil, E. Hilsher.....	508,711
Knitgarment, S. B. & F. F. Lewis.....	508,429
Knitting machine, circular, E. J. France.....	508,512
Knitting machines, adjustable support for the cloth-wheels and burr wheels of rotary, E. Vermilyea.....	508,452
Laces, apparatus for pointing and punching shoe, P. Goldstein (r).....	11,385
Ladder, L. D. Craig.....	508,816
Lamp burner, J. J. Smith.....	508,572
Lamp chimney cleaner, Rink & Ruppenthal.....	508,761
Lamp, electric bicycle, G. Mayr.....	508,482
Lamp, electric arc, E. Thomson.....	508,656
Lamps, apparatus for treating filaments for incandescent electric, Burnett & Doane.....	508,678
Lamps, leading-in wire for incandescent, E. Thomson.....	508,650
Lamps, stand for testing electric arc, E. R. Knowles.....	508,623
Lantern, F. Whiting.....	508,496
Lantern holder, C. J. Sonnema.....	508,491
Lantern pinion, A. J. Jungs.....	508,886
Lantern, reflector, F. A. Smith.....	508,776
Latch, L. J. Gray.....	508,541
Latch and lock combined, A. Linsmayer.....	508,890
Lath machine, sheathing, I. G. Jenkins.....	508,545
Level, spirit, H. O. Risser.....	508,762
Level and locking mechanism therefor, M. J. Todd.....	508,784
Light, See Search light.....	
Lighting circuits, branch block for incandescent, A. Swan.....	508,644
Lighting device, hydrocarbon, F. A. Cody.....	508,812
Lighting arrester, E. Thomson.....	508,648
Liquid meter, F. S. Shippen.....	508,774
Liquids, extender, and solutions, preparing for mented and distilled, C. Hornbostel.....	508,882
Load lifter and carrier, T. H. Butcher.....	508,866
Locomotive fire kindling apparatus, J. McNaughton.....	508,739
Loom picker strap holder, L. W. Milliken.....	508,550
Lubricator, M. R. Jordan.....	508,485
Machine die, A. Vuillier.....	508,789
Magnet coil and manufacturing same, field, Johnson & Haskins.....	508,620
Magnet coils, connector for electro, M. O. Southworth.....	508,643
Magnetic dynamometer, snap & spring.....	508,827
Mail bag fastener, A. Roosevelt.....	508,441
Manhole cover, Hickey & Norris.....	508,471
Marble, manufacturing artificial, Majewski & Beyenbach.....	508,731
Mechanical movement, A. G. Brewer.....	508,676
Metal tie and nut lock, J. P. Warner.....	508,664
Meter, See Electric meter.....	
Mill, See Bone cutting mill. Stamp mill. Windmill.....	
Mine trap door, Herth & Bonenberger.....	508,879
Mines, etc., recovering lost coal from, R. Y. Mitchell.....	508,523
Mining machine, E. Zohle.....	508,856
Mould, See Glass mould. Sand mould.....	
Mould skin gate, W. A. James.....	508,884
Motor, See Current motor. Ether vapor motor. Fan motor. Railway motor.....	
Muzzle, J. Heinz.....	508,419
Napping, apparatus therefor, forming and sticking, W. A. Baglin.....	508,859
Newspaper holder, W. Schuetzler.....	508,769
Newspaper lock box, E. J. Colby.....	508,870
Newspaper wrapping machine, L. C. Crowell.....	508,567
Nut lock, H. P. Brown.....	508,402
Nut lock, Harmon & Faber.....	508,823
Nut lock, W. M. Reed.....	508,757
Oil can, T. Schirmacher.....	508,767
Ore roasting and calcining furnace, R. C. Greer.....	508,452
Packing case, E. A. Turner.....	508,451
Panorama, balloon, C. G. Rodeck.....	508,763
Paper box, J. J. Hoffman.....	508,970
Paper boxes, machine for making, C. R. Bannhr.....	508,571
Paper cutter, rotary, H. L. Mellor.....	508,576
Paper tubes, machinery for the manufacture of non-pasted, A. E. Decouffe.....	508,505
Paper winding shaft, J. H. Baker et al.....	508,801
Paring fruit or vegetables, machine for, E. J. Lewis.....	508,720
Paving block, H. Brunson.....	508,837
Pegging jack, G. O. Bjorkander.....	508,862
Pencil, addition, A. M. Grubbs.....	508,417
Pencil holder, G. W. Waburn.....	508,791
Pencil sharpener, A. Fornander.....	508,693
Pendulum escapement, S. Riefler.....	508,760
Pendulum, machine for compensating, S. Riefler.....	508,830
Piano action, J. F. Conover.....	508,813
Pianoforte action, J. Greener.....	508,416
Picture hanger, F. Gaiser.....	508,540
Pile fillings, preparing, Brewster & Abell.....	508,598
Pile flabs, machine for smoothing and polishing, F. Bartel.....	508,602
Pile, iron or steel, A. Hooven.....	508,881
Pipe threading machine, F. W. Smith, Jr.....	508,581
Planing machine, J. S. Graham.....	508,516
Planter, corn, L. C. Evans.....	508,568
Plastic material, manufacturing articles of, West & Whipple.....	508,494
Plow, sulky, S. E. Calif.....	508,411
Pocket or bag hanging, L. A. Margesson.....	508,893
Postal note, E. A. Curley.....	508,601
Pot, See Teapot.....	
Potato digging machine, G. Wragg.....	508,460
Press, See Baling press. Bookbinding press.....	
Pressure engine, fluid, R. A. Parke.....	508,525
Printing machine, W. M. D. Turton.....	508,535
Printing press web feeding device, J. L. Cox.....	508,814
Printing show bills or similar articles, F. G. An-nison.....	508,497
Profiling machine, G. Hunter.....	508,745
Pulley line hanger, H. Kelschwein.....	508,758
Pulping engine, G. Miller.....	508,734
Pump, air, W. C. Whitacre.....	508,495
Pump, duplex rotary force, I. P. Lambing.....	508,574
Punch and stamp, combined ticket, W. S. Eisenman.....	508,821
Quicksand, method of and apparatus for handling or controlling, C. Horton.....	508,714
Rack, See Rotating rack.....	
Rail frog, automatic, H. W. Byers.....	508,867
Rail joint, J. Schuler.....	508,580
Rails, apparatus for unloading and distributing, H. W. Byers.....	508,868
Railway brake, electric, A. De Bover.....	508,905
Railway conduit, electric, A. J. Robertson.....	508,578
Railway, electric, J. C. Henry.....	508,615
Railway, elevated, L. Johnston.....	508,478
Railway motor, electric, E. D. Priest.....	508,653
Railway rail brace, D. Markley.....	508,575
Railway rail splice, A. McHugh.....	508,940
Railway spike, J. L. Gage.....	508,577
Railway switch, V. Crusier.....	508,413
Railway switch, electric, E. M. Bentley.....	508,672
Railway track cleaner, electric, H. O'Connor.....	508,743
Railway trolley, electric, N. C. Bassett.....	508,669
Railway trolley, electric, J. Chase.....	508,538
Railway trolley, electric, D. Field.....	508,539
Railway trolley, electric, W. H. Knight.....	508,622
Railways, converter system for electric, C. S. Bradley.....	508,807
Rake, See Hay rake.....	
Ratchet wrench, M. D. Schaller.....	508,845
Razor strap case, W. F. Smith.....	508,443
Recorder, See Speed recorder.....	
Refrigerator, Kroenke & Bindewald.....	508,520
Refrigerator weighing and registering attachment, W. B. Dickson.....	508,507
Register, See Autographic register.....	
Resawing machine, Graham & Kane.....	508,515
Resin, manufacture of, R. L. Etheridge.....	508,608
Rheostat, J. B. Blood.....	508,674
Rocking chair, S. Chambers.....	508,403
Roofing, C. E. Pope.....	508,751
Rotary engine, W. S. Petty.....	508,555
Rotating rack for holding robes, etc., F. G. Wood.....	508,459
Rubber boot, O. P. Hurd.....	508,619
Safe, E. Meyers.....	508,895
Safe locks, method of and apparatus for controlling and utilizing concussion and applying it to, M. A. Dalton.....	508,902
Sand mould, S. J. Adams.....	508,540
Sash weight, L. S. Johnson.....	508,440
Saw, crosscut, F. Moss.....	508,484
Saw filing device, G. A. Kennedy.....	508,722
Saw handle, E. Andrews.....	508,798
Scraper, E. J. Davy.....	508,685
Screwdriver, S. S. Hand.....	508,706
Screw machine, automatic, O. P. Briggs.....	508,564

Search light, A. L. Rohrer.....	508,642
Separator, Wheelan & Jessup.....	508,792
Sewing machine, G. H. Colley.....	508,600
Sewing machine, D. Howell.....	508,715
Shade banger, window, J. A. Thompson.....	508,783
Shaft, structural hollow, Johnson & Stowe.....	508,826
Sheet metal can, F. H. Palmer.....	508,554
Shoulder brace, W. H. Horn.....	508,713
Show case or rack, E. F. Spencer.....	508,445
Show tray for dried fruit, W. R. M. Tortat.....	508,449
Shutter closer and fastener, J. K. Christy.....	508,404
Sifter, ash, Lewis & Ross.....	508,728
Skate truck, roller, C. G. Hoerle.....	508,617
Skating rink, artificial ice, T. L. Rankin.....	508,755
Sliding gate, H. Withey.....	508,466
Slate, drawing, A. K. Cross.....	508,468
Slate dressing or planing machine, T. J. Rueh.....	508,579
Snow sweeper, N. C. Bassett.....	508,668
Soap, manufacturing toilet, T. C. Stearns.....	508,777
Soap suspension attachment, C. A. Breul.....	508,809
Spectacles, M. F. Wickliffe.....	508,457
Speed indicator for shafting, W. F. Dial.....	508,686
Speed recorder, J. C. Henry.....	508,614
Spindle support, J. H. Northrop.....	508,742
Spokeshaft, H. Lanfair.....	508,427
Stamp and C. H. Burgess.....	508,855
Stamp mill and amalgamator, Carter & Bell.....	508,679
Stand, See Umbrella stand.....	
Stave bending machine, J. Deters.....	508,506
Steam boiler, D. Rousseau.....	508,532
Steam-tight coupling, L. M. Rouse.....	508,705
Steam trap, M. Hey.....	508,708
Steam trap, R. Lettich.....	508,797
Stocking supporter, O. Huff.....	508,883
Stone, machine for sawing blocks of, A. Jean-saume.....	508,825
Stove grate, F. Will.....	508,458
Stove, heating, J. Wilson.....	508,794
Stove or furnace, H. C. Hornish.....	508,427
Stovepipe fastener, A. F. Fedewa.....	508,574
Stump extractor, C. N. Blood.....	508,401
Sugar by synthesis, manufacture of crystallizable, J. E. Pellegrini.....	508,747
Sulky, W. A. Galbraith.....	508,415
Sulky, railing, T. Harrington.....	508,707
Switch, See Car switch. Electric snap switch.....	
Railway switch.....	
Switch, W. H. Robbins.....	508,840
Switchboard, multiple, M. G. Kellogg (r).....	11,386 to 11,388
Switchboard, power station, Rohrer & Mansfield.....	508,641
Synchronism, device for indicating, C. F. Scott.....	508,489
Table, See Display table.....	
Table and writing cabinet, combined, J. Danner.....	508,603
Tack driving machine, G. A. Stiles.....	508,780
Tack, plumber's, W. H. Every.....	508,822
Tacking machine, hand, C. W. King.....	508,547
Tea pot, coffee pot, E. F. Mann.....	508,828
Telephone, electric, E. Noriega.....	508,830
Telephone transmitter, E. Noriega.....	508,829
Thill coupling, J. R. Mikesell.....	508,836
Thill coupling, J. R. Perkins.....	508,526
Time recorder, workman's, M. M. Zellers.....	508,461
Tire, bicycle, R. H. Hosford.....	508,621
Tire, pneumatic, Kirk & Hosford.....	508,724
Tire, pneumatic, J. G. A. Kitchen.....	508,746
Tire, pneumatic, C. F. Pease.....	508,746
Tire, rubber, Buck & Volger.....	508,406
Tire, wheel, C. A. Gildemeyer.....	508,610
Tongues for drawing skelps, W. McCracken.....	508,738
Tongue, pipe, H. Alexander.....	508,801
Toy, J. L. Tate.....	508,558
Track sanding apparatus, C. W. Sherburne.....	508,849
Transformers, cooling, E. Thomson.....	508,654
Trap, See Steam trap.....	
Trolley lines, traction of, G. Q. Seaman.....	508,771
Tug hook, D. H. Langan.....	508,521
Twine cutter, W. K. Kennard.....	508,424
Typewriting machine type cleaner, A. G. MacGregor.....	508,904
Umbrella, folding, F. M. Hunt.....	508,717
Umbrella frame, A. R. Peppin.....	508,436
Umbrella stand, J. Danner.....	508,593
Valve, J. B. Branden.....	508,464
Valve gear, W. B. Waterman.....	508,588
Valve mechanism, air brake, T. H. Haberkorn.....	508,702
Valve operating device for wash basins, bathtubs, etc., discharge, J. H. Stevens.....	508,585
Valve, steam, J. N. Murphy.....	508,486
Valve, steam cylinder relief, W. H. Bailey.....	508,598
Vehicle brake, P. J. Hanley.....	508,612
Vehicle brake, S. E. Odell.....	508,832
Vehicle, passenger, J. De Witt.....	508,414
Vehicle running gear, W. R. Maxwell.....	508,894
Velocipede car, D. W. Brunton.....	508,500
Velocipede pedal, T. Broadbent.....	508,622
Violin, P. Donnelly.....	508,508
Violin bow, Noble & Street.....	508,741
Vise for milling machines or planers, V. W. Mason, Jr.....	508,732
Wagon running gear, E. E. Henderson.....	508,420
Wardrobe fixture, J. J. Bissel.....	508,586
Warehouse, grain storage, D. R. Bowker.....	508,561
Washing machine, J. Reed.....	508,756
Watch, stem winding and setting, C. H. Bagley.....	508,800
Water for bathing, etc., device for mixing hot and cold, J. H. Stevens.....	508,384
Waterproofing and airproofing inflatable textile fabrics, S. T. Cowles.....	508,410
Water tube boiler, W. Cowles.....	508,410
Weather strip, R. H. Cutler.....	508,504
Wheel, See Car wheel.....	
Whiffetree, E. J. Smith.....	508,444
Whiffetrees, anti-rattler for, T. F. McKenna.....	508,901
Windmill, W. B. Collins.....	508,688
Windmill, G. B. Snow.....	508,829
Wire connector, G. A. Trumbull.....	508,587
Wire reel carrier, F. C. Klipstein.....	508,426
Wire ropeway grip, D. A. Byers.....	508,810
Wire stretcher, P. Loudenbergh.....	508,891
Wood graining machine, A. Giacomini.....	508,636
Wood surfaces, finishing, M. D. Fernandez.....	508,820
Woodworking tool, L. S. Crittenden.....	508,412
Wrench, See Ratchet wrench.....	
Wrench, H. H. Kendrick.....	508,519

DESIGNS.

Bread loaf, C. C. Roos.....	22,882
Corset, W. W. Gould.....	22,883
Corset, D. H. Warner.....	22,884
Hub runner, J. E. Hobbs.....	22,885
Stove, heating, G. O. Bergstrom.....	22,910
Stove lamp, J. F. Myers.....	22,911
Wall paper, C. Boozee.....	22,885 to 22,909

TRADE MARKS.

Beer, lager, Ruff Brewing Company.....	23,805
Canned fruits and vegetables, Turin Canning and Pickling Company.....	23,809, 23,810
Cement, English Portland, National Building Supply Company.....	23,813
Cement, German Portland, National Building Supply Company.....	23,814
Cocoa butter, prepared, J. D. Blooker.....	23,804
Corsets, E. Schweinburg.....	23,829
Fountains, brooders, and incubators for poultry, G. S. Singer.....	23,829
Fruit, pie, W. H. Marvin & Company.....	23,806
Kraut, C. Schopp & Company.....	23,812
Liniments, C. Protektor.....	23,826
Meat and compound thereof, extracts of, Valen-tine's Meat-Juice Company.....	23,811
Oils, lubricating, F. Shump.....	23,815
Pharmaceutical or dietetical compounds, Farben-fabriken, vormals Fr. Bayer & Company.....	23,823
Pills, plasters, lozenges, and a remedy for coughs, B. A. Hartsh.....	23,824
Plasters, liniments, ointments, medicated candy, and remedies for coughs, cholera, and head-ache, Wilkins & Beckner.....	23,825
Printing presses, Liberty Machine Works.....	23,828
Paints and compositions for protecting iron struc-tures from corrosion, Walles, Dove & Com-pany.....	23,817
Paints, vehicle, J. C. Weaver.....	23,816
Remedies, certain named, E. M. Beals.....	23,821
Remedies, certain named, F. P. Cummings.....	23,822
Scouring and polishing preparations, Schulz & Philippi.....	23,820
Soda, L. I. Burroughs.....	23,818
Soda, dissolved washing, A. Stromberg & Com-pany.....	23,819
Suppositories, R. E. Harris & Company.....	23,827
Whisky, P. R. Hentz & Company.....	23,806

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863 will be furnished from this office for 25 cents. In ordering please state the name and number of the patent desired, and remit to Munn & Co., 361 Broadway, New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list, provided they are simple, at a cost of \$40 each. If complicated the cost will be a little more. For full instructions address Munn & Co., 361 Broadway, New York. Other foreign patents may also be obtained.

Advertisements.

ORDINARY RATES.

Inside Page, each insertion - - 75 cents a line
Back Page, each insertion - - - \$1.00 a line
For some classes of Advertisements, Special and Higher rates are required.

The above are charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at Publication Office as early as Thursday morning to appear in the following week's issue.

"Star" LATHE
Foot Lathe Swings 24 in.
Screw Cutting Automatic Cross Feed, etc.
Seneca Falls Mfg. Co. 695 Water St., Seneca Falls, N.Y.

IMPROVED LATHES MODERN ENGINE DESIGNS
Also Foot Lathes, Tools and Supplies. Catalogue Free
Sebastian Lathe Co. 120-122 Culvert Street CINCINNATI, OHIO.

AIR COMPRESSORS, ROCK DRILLS, COAL CUTTERS
Stone Channelling Machines
THE INGERSOLL-SERGEANT DRILL CO.
HAYMEYER BUILDING, 26 CORTLAND ST. New York.

SCIENTIFIC AMERICAN SUPPLEMENT. Any desired back number of the SCIENTIFIC AMERICAN SUPPLEMENT can be had at this office for 10 cents. Also to be had of newsdealers in all parts of the country.

ROCK DRILLS
AIR COMPRESSORS & GENERAL MACHINERY FOR MINING, TUNNELING, QUARRY & RAILROAD WORK
RAND DRILL CO. 23 PARK PLACE NEW YORK

HYPNOTISM: its Uses and Abuses. The science easily acquired. Illustrated book, just out, \$1.00. 100 page pamphlet, 10c. Address PROF. ANDERSON, S. A. 11, 182 State St., CHICAGO.

The Remington Typewriter.



As Perfect in Design and Construction as Original Ingenuity, Long Experience, and Constant Improvement can make a Writing Machine. It is Simple, Well Made, Practical, Durable, Easy to Learn and to Operate.

Wyckoff, Seamans & Benedict, 327 Broadway, New York.

IF YOU HAVE ANY SMALL ARTICLES in Brass or Iron that you want manufactured in quantities, write to THE JONES BROS. ELECTRIC CO., 28-30-32 West Court St., Cin'ti, O.

NICKEL AND ELECTRO-PLATING
Apparatus and Material.
THE HANSON & VAN WINKLE CO.
NEWARK, N. J.
81 LIBERTY ST., N. Y.
23 S. CANAL STREET, CHICAGO.

Parsons Horological Institute.
Learn the Watch Trade
Engraving and Jewelry Work.
PARSONS, IDE & CO. Circular free.
302 Bradley Ave., PEORIA, ILL.

VANDUZEN STEAM PUMP
THE BEST IN THE WORLD.
Pumps Any Kind of Liquid.
Always in Order, never Clogs nor freezes. Every Pump Guaranteed.
10 SIZES.
200 to 12000

Founded by Mathew Carey, 1785.

HENRY CAREY BAIRD & CO.
Industrial Publishers, Booksellers, and Importers,
810 Walnut St., Philadelphia, Pa., U. S. A.
Our new and Revised Catalogue of Practical and Scientific Books, 88 pages, 8vo., and our other Catalogues and Circulars, the whole covering every branch of Science applied to the Arts, sent free and free of postage to any one in any part of the world who will furnish his address.

BARNES' New Friction Disk Drill.
FOR LIGHT WORK.
Has these Great Advantages:
The speed can be instantly changed from 0 to 1600 without stopping or shifting belts. Power applied can be graduated to drive, with equal safety, the smallest or largest drills within its range—a wonderful economy in time and great saving in drill breakage. Send for catalogue.
W. F. & JNO. BARNES CO.,
1999 Ruby St., - Rockford, Ill.

NOTICE.

MINISTRY OF PUBLIC WORKS, CAIRO, EGYPT.
The Egyptian Government puts up to adjudication the construction and working of a tramway line of narrow gauge from Mansourah to Menzaleh and Matarieh, with its branch lines, on the conditions of the act of concession and the specification, copies of which will be forwarded to those who apply for them by letter addressed to the Minister of Public Works, Cairo, Egypt.
Offers will be received at this Ministry up to noon on the 1st February, 1894.
Persons tendering should indicate the width of the line, and all other dispositions relative to the type of permanent way and rolling stock, and the term for which they require the concession. This term may not exceed forty years.
The Egyptian Government reserves to itself the right of selecting and accepting whichever offer it prefers, or of rejecting any offer, however advantageous it may appear to be.

STEREOPTICONS.
MAGIC LANTERNS AND ACCESSORIES. SEND FOR CATALOGUE TO CHAS BESÉLER MAKER 218 CENTRE ST. NEW YORK.

Before you Order and Subscribe to your **FOREIGN PERIODICALS** for next year, please send for estimate to **G. E. STECHERT, 810 Broadway, N. Y.,** Importer of Books and Periodicals. Branches.—LEIPZIG, LONDON, PARIS.

GATES ROCK & ORE BREAKER
Capacity up to 200 tons per hour.
Has produced more ballast, road metal, and broken more ore than all other Breakers combined. Builders of High Grade Mining Machinery. Send for Catalogues.
GATES IRON WORKS,
50 C. Clinton St., Chicago
136 C. Liberty Street, New York
237 C. Franklin St., Boston, Mass.

WANTED—A manufacturer of Bright Cold-Rolled Steel wishes to correspond with parties owning or controlling patented novelties which could be manufactured out of this material.
Address **J. G., Box 773, New York.**

A FIRST CLASS TELESCOPE
OF 2 1/2 IN. APERTURE FOR \$4.50
ALSO OUTFITS AT HIGHER COST
MICROSCOPIC OUTFITS OF BEST QUALITY AT LOWEST COST
OPTICAL CO., ROCHESTER, N.Y.

ALUMINUM SKATES.
Mosher's Aluminum Racer. Patent applied for. Runner of the best tool steel 1-16 inch thick, 17 1/2 inches long. Aluminum top is polished. Will not rust, warp or split. Is lighter, stronger and handsomer than wood. This skate is of same model with which I made the fastest official time on record. Sent to any address, c. o. d., for \$6 per pair. Address **S. D. MOSHER, Storm King, Dutchess Co., N. Y.**

MALLEABLE AND FINE GRAY IRON ALSO STEEL CASTINGS FROM SPECIAL PATTERNS
FINE TUNING JAPANNING AND FINISHING
THOMAS DEVLIN & CO.,
LEHIGH AVE. & AMERICAN ST. PHILA.

STEEL TYPE FOR TYPEWRITERS
Stencils, Steel Stamps, Rubber and Metal Type Wheels, Dies, etc.
Model and Experimental Work. Small Machinery, Novelties, etc., manufactured by special contract.
New York Stencil Wks. 100 Nassau St., N.Y.

"PARAGON" PROJECTION LANTERN.
The only Electric Lamp for Direct or Alternating Current.
A perfectly steady silvery white light, holding position in the optical centre automatically. Can be seen operating in our Dark Room. Correspondence solicited.
Send for Descriptive Circular.
QUEEN & CO., Inc., Philadelphia, Pa., U. S. A.

14 KARAT GOLD PLATE
CUT THIS OUT and send it to us with your name and address and we will send you this watch by express for examination.
Guaranteed for 5 Years and chain & charm sent with it. You examine it and if you think it is a bargain pay our sample price, \$2.50, and it is yours. It is beautifully engraved and warranted the best time-keeper in the world for the money and equal in appearance to a genuine Solid Gold Watch. Write today, this offer will not appear again.
THE NATIONAL MFG. AND IMPORTING CO.,
334 Dearborn St., Chicago, Ill.

THE GRIFIN MILL
A perfect pulverizer of all refractory substances by either the wet or dry process. It works better and at less expense than any other Mill, and is conceded to be the only perfect pulverizing Mill manufactured.
For FREE Illustrated Pamphlet address
BRADLEY FERTILIZER CO., 92 STATE ST, BOSTON.

W. L. DOUGLAS \$3 SHOE FOR GENTLEMEN.
Best Calf Shoe in the World for the Price.
Fine Calf Dress Shoes, \$3.50, \$4.00 and \$5.00. Very Stylish.
Police-men's, Farmers' and Letter Carriers' \$3.50 Shoe. Three Soles, Extension Edge.
\$2.50 and \$2.00 Shoes for General Wear. Extra Value.
Boys and Youths wear the \$2.00 and \$1.75 School Shoe. For Ladies, \$3.00, \$2.50 and \$2.00 Shoes. Best Dongola.
W. L. Douglas Shoes are made of the best material, in all the latest styles, and sold by shoe dealers everywhere.
Do You Wear Them?
W. L. Douglas' name and price is stamped on the bottom before they leave the factory, to protect you against high prices. Doing the largest advertised shoe business in the world we are contented with a small profit, knowing that the extra value put in W. L. Douglas Shoes will give a continuous increase to our business. The dealer who sells you unstamped shoes makes the price to suit himself. He will charge you from \$4 to \$5 a pair for shoes of the same quality as W. L. Douglas \$3 Shoe. The stamped name and price system is the best for you, because it guarantees full value by the manufacturer, for the money paid, and saves thousands of dollars annually to those who wear W. L. Douglas Shoes.
If you wish to economize in your footwear it will pay you to examine W. L. Douglas Shoes when next in need. Sent by Mail, Postage Free, when dealers cannot supply you. Take no substitute. Send for Catalogue with full instructions how to order by mail.
Address **W. L. DOUGLAS, Box 551, Brockton, Mass.**

150 AMERICAN WATCH
\$1.50 will now buy a reliable AMERICAN WATCH in strong GOLD PLATED Dust Proof Case. Will not vary a minute in 30 days; is as durable as any watch made. FULLY GUARANTEED. (Publishers of this paper will tell you we are reliable.) It has AMERICAN patent lever MOVEMENT, Patent Escapement and Regulator, Lantern Pinion, 240 beats to minute; No key required to wind and set; weight 4 oz., exactly like cut. Postpaid \$1.50, 3 for \$4.00, 12 for \$15.00, by express. Mention paper and we will include handsome gold plated CHAIN & CHARM. AGENTS & Storekeepers send for TERMS. Catalogue of 1000 new articles FREE.
ROBERT H. INGERSOLL & BRO.,
65 CORTLAND ST., NEW YORK CITY.

WOODEN TANKS FOR RAILROADS, WATER WORKS, MILLS, FARMS, ETC. COMPLETE STOCK OF PLANS & SPECIALTY SPECIFICATIONS FURNISHED FOR FOUNDATIONS & TOWERS.
WE CALDWELL CO.
No. 217 E. MAIN ST. LOUISVILLE KY.

ICE-HOUSE AND COLD ROOM.—BY R. G. Hatfield. With directions for construction. Four engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 59. Price 10 cents. To be had at this office and from all newsdealers.

ALANSON CARY
MANUFACTURER OF STEEL SPRINGS OF EVERY DESCRIPTION
240 & 242 W. 29TH ST. NEW-YORK

OIL ENGINES.
The Shipman Automatic Steam Engine
1, 2, 4, 6 and 8 HORSE POWER, SINGLE.
8 and 22 HORSE POWER, COMPOUND.
Insurance Not Affected.
STATIONARY AND MARINE.
For All Small Power Work.
SHIPMAN ENGINE CO. 200 Summer St., Boston, Mass.

MAKE YOURSELF A MECHANICAL ENGINEER OR DRAUGHTSMAN;
Or qualify to take charge of or to superintend the manufacture of machinery, by devoting your idle hours to Home Study by the method of **THE CORRESPONDENCE SCHOOL OF MECHANICS**, Scranton, Pa. To begin, students need only know how to read and write. Moderate charges. Send for FREE Circular.

AUTOMATIC SHELL EXTRACTOR
HILL He Pays on this American made Revolver. Full Nickel-Plated. Rubber Stock, Center Fire, 32 or 38 caliber, Five shot
\$4.47 \$15.00
3 in. long, rifle barrel 3 1/2 in. Long fluted cylinder. Low curved hammer, which prevents accidental discharge. Weight 16 oz. Cut this out and send with order and we will ship by express C. O. D. If on examination you find it as represented pay a. g. t. \$4.47 we paying all charges. **W. HILL & CO., 207 State St., Chicago.**

The Orcutt Comp'y Leading Lithographers
W. B. ORCUTT, Genl. Mgr.
Corresp'd'ce Solicited. Chicago.

HE IS DEAD
To his own interest, who deals in Arms and Ammunition, or who shoots a Rifle, Pistol, or Shot Gun, and has not a copy of the IDEAL HAND BOOK, No. 42, 80 pages of solid information. Just out. (Mention Scientific American.) BE ALIVE and send for one FREE to all countries. Send stamps for postage.
IDEAL MFG. CO., Drawer 860, New Haven, Conn., U. S. A.

CLAY & TORBENSEN GLOUCESTER CITY, N.J.
DESIGNERS & BUILDERS OF YACHTS, LAUNCHES AND SAILING CRAFT.
SEND 3 CENTS FOR CATALOGUE.

AN IDEAL STUB PEN—Esterbrook's Jackson Stub, No. 442
A specially EASY WRITER, a GOOD INK HOLDER and a DELIGHT to those who use a STUB PEN. ASK YOUR STATIONER FOR THEM. Price, \$1.00 per gross. **THE ESTERBROOK STEEL PEN CO., 26 John St., New York.**

THE GRIFIN MILL
A perfect pulverizer of all refractory substances by either the wet or dry process. It works better and at less expense than any other Mill, and is conceded to be the only perfect pulverizing Mill manufactured.
For FREE Illustrated Pamphlet address
BRADLEY FERTILIZER CO., 92 STATE ST, BOSTON.

THE WATER JACKET SIPHON CONDENSER
REQUIRES NO AIR PUMP.
28 IN. VACUUM.
CHICAGO WATER JACKET CONDENSER CO.
47 W. WASHINGTON ST. CHICAGO, ILL.
SEND FOR CIRCULAR.

Rubber Rolls and Wheels.
Power Wringing Machines, Drying and Ventilating Fans. All styles of Trucks made to order. Catalogues free.
GEORGE P. CLARK,
Box 1, Windsor Locks, Conn.

BUY THE FOX PATENT SAFETY RAZOR
EVERY MAN'S OWN BARBER
MAKES SHAVING A LUXURY
NO DANGER OF CUTTING
SKIN DISEASES PREVENTED
RAZOR \$2.00. STROPPING MACHINE & STROP \$1.75.
BOTH IN ONE BOX \$3.75 BY MAIL FREE
E. LOTHAR SCHMITZ, DEALER
92 & 94 READE ST. NEW YORK.

\$10.00 to \$50.00 per night. A light and profitable business. Magic Lanterns and Views of popular subjects. Catalogues on application. Part 1 Optical, 2 Mathematical, 3 Meteorological, 4 Magic Lanterns, 5 L. MANASSE, 88 Madison Street, Chicago, Ill.

THE STURTEVANT AUTOMATIC STEAM ENGINES
HORIZONTAL & UPRIGHT.
SEND FOR CATALOGUES TO
BESTURTEVANT & CO. BOSTON, MASS.
NEW YORK, PHILA., CHICAGO, LONDON.

THE MODERN MARINE BOILER.—By A. B. Willis, U.S.N. Description of the principal features of the boilers of the United States man-of-war New York, with a plea to inventive minds for the production of a type of boiler which shall do away with the necessity of the present enormously large and heavy shells, and present a lighter substitute that will perform the duties of both envelope and heating surface conjointly. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 570. Price 10 cents. To be had at this office and from all newsdealers.

THE QUAKER CITY GRINDING MILL
FOR CORN and COBS, FEED and TABLE MEAL.
Send for all mills advertised. Keep the best and return all others.
A. W. STRAUB & CO., Philada. Pa.
Territory East of Ohio.
SPRINGFIELD IMPLEMENT CO, Springfield, O., Ter'y West of O.

"ECONOMY IS WEALTH."
Agents wanted to sell the Improved H. A. I. Type writer. The only standard machine made for a reasonable price. Prints all languages. Interchangeable type. Send for Catalogue.
Address **N. T. PEPPER CO.,**
611 Washington Street, Boston, Mass.
Mention Scientific American.

NOW READY!
Fourteenth Edition of
Experimental Science

EXPERIMENTAL SCIENCE
REVISED AND ENLARGED.
120 Pages and 110 Superb Cuts added.
The unprecedented sale of this work shows conclusively that it is the book of the age for teachers, students, experimenters, and all others who desire a general knowledge of Physics or Natural Philosophy.
In the new matter contained in the last edition will be found the Scientific Use of the Phonograph, the curious optical illusion known as the Anorthoscope, together with other new and interesting Optical Illusions, the Optical Projection of Opaque Objects, new experiments in Projection, Iridescent Glass, some points in Photography, including Hand Cameras, Cane Cameras, etc.; Systems of Electrical Distribution, Electrical Ore Finder, Electrical Ricker, Electric Chimes, How to Color Lantern Slides, Study of the Stars, and a great deal of other new matter which will prove of interest to scientific readers.
840 pages, 782 fine cuts, substantially and beautifully bound. Price in cloth, by mail, \$4. Half morocco, \$5.
Send for illustrated circular.
MUNN & CO., Publishers,
Office of the SCIENTIFIC AMERICAN,
361 BROADWAY, NEW YORK.

Advertisements.

ORDINARY RATES.

Inside Page, each insertion, - 75 cents a line
Back Page, each insertion, - \$1.00 a line

For some classes of Advertisements, Special and higher rates are required.

The above charges per agate line—about eight words per line. This notice shows the width of the line, and is set in agate type. Engravings may head advertisements at the same rate per agate line, by measurement, as the letter press. Advertisements must be received at Publication Office as early as Thursday morning to appear in the following week's issue.

COLD FORGED PRODUCT.

Fluted Tire Bolt

Patented Nov. 11, 1890; Oct. 20, 1891.




Is stiffer and stronger than a common bolt. The fluted shank prevents the bolt from turning in the rim and tire.

COLD FORGED

MACHINE SCREWS
STOVE BOLTS
LOCK CAP SCREWS
SIDE KNOB SCREWS
THREADED WIRES

AMERICAN SCREW COMPANY,
PROVIDENCE, R. I.



WATER MOTOR, \$5.

BOLGIANO'S LITTLE GIANT

WILL RUN YOUR SEWING MACHINE

and other Light Machinery.

A week's work done in a day.

No Plumbing Required.

Delivered free on receipt of price.

For Printing Presses, Lathes,

Grindstones, Coffee Mills, Ice

Cream freezers, Churns, Christ-

mas Gardens, Washing Machines, etc., No. 2, price \$10.

THE BOLGIANO WATER MOTOR CO.

414 Water Street, Baltimore, Md.

KODAKS \$6.00 TO \$100.00

Eastman Kodak Company,

Send for Catalogue.

Rochester, N. Y.

KNITTING MACHINERY

Knitted underwear is in vogue. The best machinery for its manufacture, such as


SHIRT MACHINES, SLEEVES,

BAR STITCH MACHINES, etc.,

are made by SCOTT & WILLIAMS,

2077 E. Cumberland Street,

Established 1865. Philadelphia, Pa., U. S. A.

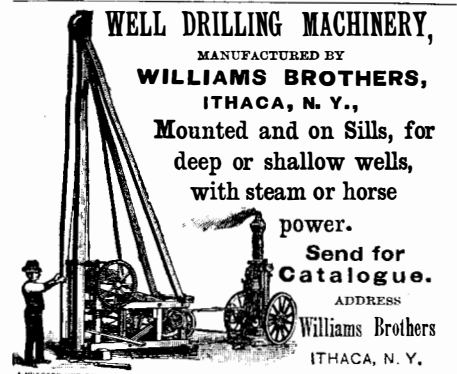

WELL DRILLING MACHINERY,

MANUFACTURED BY

WILLIAMS BROTHERS,

ITHACA, N. Y.,

Mounted and on Sills, for

deep or shallow wells,

with steam or horse

power.

Send for Catalogue.

ADDRESS

Williams Brothers

ITHACA, N. Y.

The American Bell Telephone Company

125 MILK ST., BOSTON, MASS.

This Company owns the Letters Patent No. 186,787, granted to Alexander Graham Bell, January 30, 1877, the scope of which has been defined by the Supreme Court of the United States in the following terms:

"The patent itself is for the mechanical structure of an electric telephone to be used to produce the electrical action on which the first patent rests. The third claim is for the use in such instruments of a diaphragm, made of a plate of iron or steel, or other material capable of inductive action; the fifth, of a permanent magnet constructed as described, with a coil upon the end or ends nearest the plate; the sixth, of a sounding box as described; the seventh, of a speaking or hearing tube as described for conveying the sounds; and the eighth, of a permanent magnet and plate combined. The claim is not for these several things in and of themselves, but for an electric telephone in the construction of which these things or any of them are used."

This Company also owns Letters Patent No. 463,569, granted to Emile Berliner, November 17, 1891, for a Combined Telegraph and Telephone; and controls Letters Patent No. 474,231, granted to Thomas A. Edison, May 3, 1892, for a Speaking Telegraph, which cover fundamental inventions and embrace all forms of microphone transmitters and of carbon telephones.

FOR SALE = = = Electric Launches

Used at the World's Fair, can be had at

A BARGAIN

As good as new when delivered to purchaser. Their Design and Finish cannot be improved upon. Apply without delay to

ELECTRIC LAUNCH & NAVIGATION CO.

44 BROAD STREET, NEW YORK.



THE FISHER

Patent Steam Pump Governors

For Steam Pumps Working under Pressure

and the

FISHER PATENT GRAVITY GOVERNORS

For Steam Pumps filling elevated open tanks,

are the most positive and durable devices

made for the purpose.

REDUCING VALVES.

Send for circulars and testimonials.

FISHER GOVERNOR CO.,

201 S. 1st Avenue, - - Marshalltown, Iowa.


SAWS Wanted 50,000 Sawyers and Lumbermen to send us their full address for a copy of Emerson's 127 Book of SAWS, new 1893 edition. We are first to introduce NATURAL GAS for heating and tempering SAWS with wonderful effect upon improving their quality and toughness, enabling us to reduce prices. Address EMERSON, SMITH & CO. (Limited), Beaver Falls, Pa.

AMATEUR PHOTOGRAPHERS.

Finish your own photos, on Celerite Paper. Requires no experience, long washings or expensive solutions. Entirely new process. Samples and full particulars free.

CELERITE PAPER CO., cor. 26th and State Streets,

Gerald Building, Chicago, Ill.



Accountants who use The Comptometer

Save time, avoid mistakes and do not ruin their nerves. It is operated by keys, like a typewriter, and performs addition, multiplication, division, interest, etc., etc.

First Nat'l Bank, Brownsville, Texas, writes: "The Comptometer purchased of you has taken the place of one clerk in this office."

Brotherhood Wine Co., New York City, writes: "We would not be without them if they cost twice as much."

McElveen Furniture Co., Ltd., Pittsburgh, Pa., writes: "In all the two years in which we have used it we have never known it to fail."

Brainard Co-Operative Building & Loan Association, Brainard, Minn., writes: "It is of more importance in a business office than a typewriter."

Supt. St. Lawrence State Hospital, Ogdensburg, New York, writes: "We could not get along without it except with the aid of an additional clerk."

ELECTRIC LIGHTING WE MAKE A SPECIALTY OF INSTALLING ISOLATED ELECTRIC LIGHTING PLANTS FROM 10 TO 1000 LAMPS. COLUMBIAN MFG. CO. BINGHAMTON, N. Y.

PATENTS

CAVEATS, TRADE MARKS, COPYRIGHTS.

CAN I OBTAIN A PATENT? For a prompt answer and an honest opinion, write to MUNN & CO., who have had nearly fifty years' experience in the patent business. Communications strictly confidential. A Handbook of Information concerning Patents and how to obtain them sent free. Also a catalogue of mechanical and scientific books sent free.

Patents taken through Munn & Co. receive special notice in the Scientific American, and thus are brought widely before the public without cost to the inventor. This splendid paper, issued weekly, elegantly illustrated, has by far the largest circulation of any scientific work in the world. \$3 a year. Specimen copies sent free.

Building Edition, monthly, \$2.50 a year. Single copies, 25 cents. Every number contains beautiful plates, in colors, and photographs of new houses, with plans, enabling builders to show the latest designs and secure contracts. Address MUNN & CO., NEW YORK, 361 BROADWAY.



The Smith Premier Typewriter

Embodies the most Progressive Mechanical Principles.

All the Essential Features Greatly Perfected.

Perfect and Permanent Alignment.

Easiest Running, and Nearly Silent.

All type cleaned in Ten Seconds without Soiling the Hands.

The Smith Premier Typewriter Co., Syracuse, N. Y., U. S. A.

We have 20 branch offices in the principal cities throughout the United States.

ELECTRIC MOTORS

FOR MILLS, FACTORIES, SHOPS, ETC.

Our Electric Motors received the Highest Awards at the World's Fair. Write for our Illustrated Folder.

GENERAL ELECTRIC COMPANY,

PRINCIPAL SALES OFFICES.

44 Broad Street, New York. 620 Atlantic Avenue, Boston, Mass. 173 and 175 Adams Street, Chicago, Ill. 509 Arch Street, Philadelphia, Pa. Fifth and Race Streets, Cincinnati, O. 401-407 Sibley Street, St. Paul, Minn. Equitable Building, Atlanta, Ga. 133 F Street, N. W., Washington, D. C. 15 First Street, San Francisco, Cal. Masonic Temple, Denver, Col.

All business outside the U. S. transacted by Thomson-Houston International Electric Co. 44 Broad St. New York

CASH PAID for all kinds of good Second-hand Iron and Wood-Working Machinery. Address W. P. DAVIS, ROCHESTER, N. Y.

INVENTORS! Don't order goods or get a model made until you write us. We can help you. H. H. Franklin Mfg. Co., Onondaga St., Syracuse, N. Y.

OIL WELL SUPPLY CO.

91 & 92 WATER STREET, PITTSBURG, PA.

Manufacturers of everything needed for

ARTESIAN WELLS

for either Gas, Oil, Water, or Mineral Tests


Boilers, Engines, Pipe, Cordage,

Drilling Tools, etc. Illustrated

catalogue, price lists, and discount sheets on request.

PATENT FOR SALE.

The Aeberly Cattle Stall Device for the enhancement of comfort and cleanliness of milk cattle. Is simple, durable, and can easily be adjusted to almost any crib. The U. S., Great Britain and Canada letters patent for sale. M. SCHEMBRI, 336 Van Buren St., St. Paul, Minn.

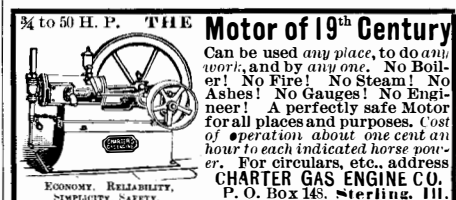

Motor of 19th Century

Can be used any place, to do any work, and by any one. No Boiler! No Fire! No Steam! No Ashes! No Gases! No Noise! A perfectly safe Motor for all places and purposes. Cost of operation about one cent an hour to each indicated horse power. For circulars, etc., address CHARTER GAS ENGINE CO. P. O. Box 145, Sterling, Ill.

ECONOMY, RELIABILITY, SIMPLICITY, SAFETY.

SCIENTIFIC EXPERIMENTS. — Description of some simple and easily performed scientific experiments. Foucault's pendulum, exchange of water and wine, the bird in the cage, the five-pointed star, the sum of the angles of a triangle, surface of the sphere, with 6 illustrations. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 875. Price 10 cents. To be had at this office and from all newsdealers.

AGENTS WANTED FOR FINE TOOLS IN EVERY SHOP. C. H. BESLY & CO. CHICAGO, ILL. U. S. A.

THE SCIENTIFIC AMERICAN

ESTABLISHED 1845.

The Most Popular Scientific Paper in the World

Only \$3.00 a Year. Including Postage.

Weekly—52 Numbers a Year.

This widely circulated and splendidly illustrated paper is published weekly. Every number contains sixteen pages of useful information and a large number of original engravings of new inventions and discoveries, representing Engineering Works, Steam Machinery, New Inventions, Novelties in Mechanics, Manufactures, Chemistry, Electricity, Telegraphy, Photography, Architecture, Agriculture, Horticulture, Natural History, etc. Complete list of patents each week.

Terms of Subscription.—One copy of the SCIENTIFIC AMERICAN will be sent for one year—52 numbers—postage prepaid, to any subscriber in the United States, Canada, or Mexico, on receipt of three dollars by the publishers; six months, \$1.50; three months, \$1.00.

Clubs.—Special rates for several names, and to Post Masters. Write for particulars.

The safest way to remit is by Postal Order, Draft, or Express Money Order. Money carefully placed inside of envelopes, securely sealed, and correctly addressed, seldom goes astray, but is at the sender's risk. Address all letters and make all orders, drafts, etc., payable to MUNN & CO., 361 Broadway, New York.

THE SCIENTIFIC AMERICAN SUPPLEMENT

This is a separate and distinct publication from THE SCIENTIFIC AMERICAN, but is uniform therewith in size, every number containing sixteen large pages full of engravings, many of which are taken from foreign papers and accompanied with translated descriptions. THE SCIENTIFIC AMERICAN SUPPLEMENT is published weekly, and includes a very wide range of contents. It presents the most recent papers by eminent writers in all the principal departments of Science and the Useful Arts, embracing Biology, Geology, Mineralogy, Natural History, Geography, Archaeology, Astronomy, Chemistry, Electricity, Light, Heat, Mechanical Engineering, Steam and Railway Engineering, Mining, Ship Building, Marine Engineering, Photography, Technology, Manufacturing Industries, Sanitary Engineering, Agriculture, Horticulture, Domestic Economy, Biography, Medicine, etc. A vast amount of fresh and valuable information obtainable in no other publication.

The most important Engineering Works, Mechanisms, and Manufactures at home and abroad are illustrated and described in the SUPPLEMENT.

Price for the SUPPLEMENT for the United States, Canada, and Mexico, \$5.00 a year; or one copy of the SCIENTIFIC AMERICAN and one copy of the SUPPLEMENT, both mailed for one year to one address for \$7.00. Single copies, 10 cents. Address and remit by postal order express money order, or check.

MUNN & CO., 361 Broadway, New York.

Building Edition.

THE SCIENTIFIC AMERICAN ARCHITECTS' AND BUILDERS' EDITION is issued monthly. \$2.50 a year. Single copies, 25 cents. Thirty-two large quarto pages, forming a large and splendid Magazine of Architecture, richly adorned with elegant plates in colors, and with other fine engravings; illustrating the most interesting examples of modern architectural construction and allied subjects.

A special feature is the presentation in each number of a variety of the latest and best plans for private residences, city and country including those of very moderate cost as well as the more expensive. Drawings in perspective and in color are given, together with Plans, Descriptions, Locations, Estimated Cost, etc.

The elegance and cheapness of this magnificent work have won for it the largest circulation of any Architectural publication in the world. Sold by all newsdealers. \$2.50 a year. Remit to

MUNN & CO., Publishers.

361 Broadway, New York.

PRINTING INKS.

The SCIENTIFIC AMERICAN is printed with CHAS. FENNER JOHNSON & CO.'S INK, Tenth and Lombard Sts., Philadelphia, and 47 Rose St., opp. Duane, New York